

UNMANNED AERIAL VEHICLES (UAVS)

MONITORING BY UAVS I.E. WHAT? (SOME THESES PROPOSALS)



Prof. Tiziana Calamoneri
Network Algorithms
A.y. 2019/20

1

- **UAVs** are flying vehicles able to autonomously decide their route (different from drones, that are remotely piloted)
- Historically, used in the military, mainly deployed in hostile territory to reduce pilot losses
- Now, new applications in civilian and commercial domains:
 - weather monitoring,
 - forest fire detection,
 - traffic control,
 - emergency search and rescue



MONITORING BY UAVS



- Let be given an AoI whose map is known
- we have a fleet of m UAVs leaving from a safe location (v_0) each with a battery B
- in the AoI there is a set $S=\{v_1, \dots, v_n\}$ of sites that must be examined (e.g. crumbled buildings after a hearthquake)
- each site v_i needs a time t_i to be inspected
- each UAV must periodically go back to v_0 in order to recharge its battery; this takes time R , typically 5-10 times B
- we want to overfly v_1, \dots, v_n "as soon as possible" in order to collect data and possibly save people

??


4

THE PROBLEM



3

THE GRAPH MODEL





5

THE GRAPH MODEL (2)

It is natural to think that it is possible to go from each node to every other node, so

there is an edge between each pair of nodes $\Rightarrow K_{n+1}$

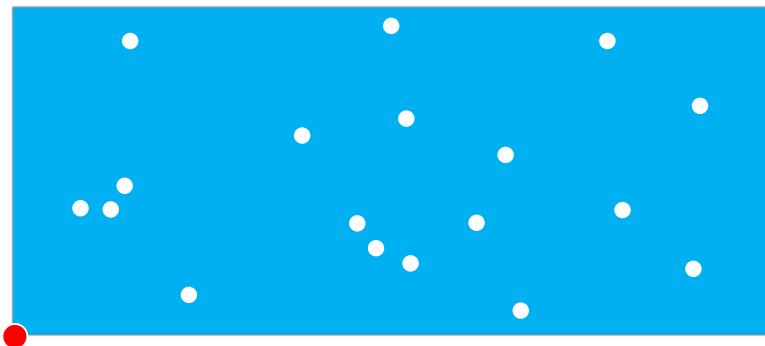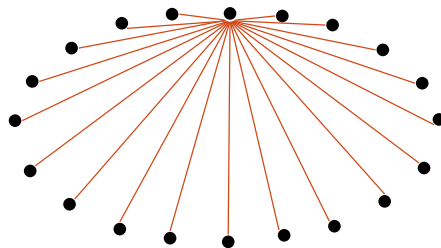


7

THE GRAPH MODEL (1)

It is natural to model this problem as a graph problem:


- sites v_1, \dots, v_n + the depot v_0 are the $n+1$ nodes of the graph

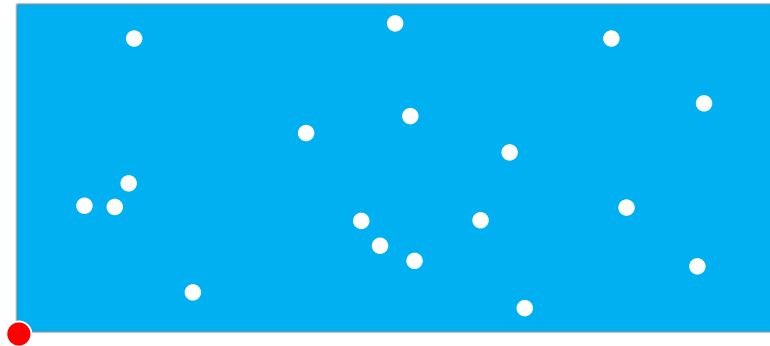

6

THE GRAPH MODEL (3)

- Each UAV has a flying+inspection time bounded by B .
- for each pair of sites (v_i, v_j) we assume their distance (stored as an edge weight function $w(u_i, u_j)$) as the time a UAV needs to go from u_i to u_j .

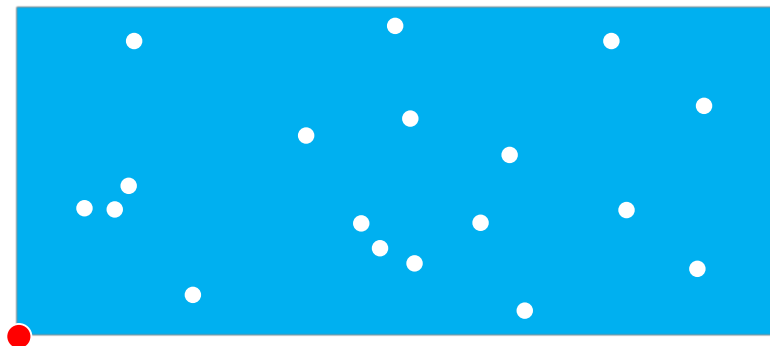


8

THE GRAPH MODEL (4)

- each UAV is characterized by a different color
- each UAV flies along a cycle (colored with the UAV color) and visits as many sites as it can (w.r.t. its battery constraint B), it goes back to the depot to recharge its battery (with time R) and it leaves again...

All sites need to be visited in the “shortest time”.

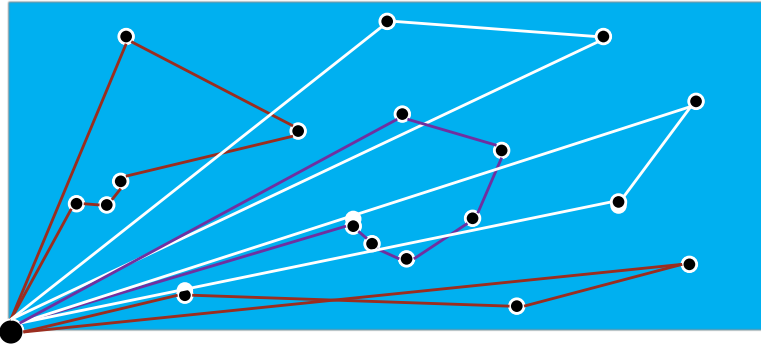

9

THE GRAPH MODEL (6)

Similarities with many problems:

mTSP multiple Traveling Salesperson

- m salespersons must overall cover n cities 😊
- objective: minimize the total length of the path 😞
- no visiting times nor battery constraint 😞



11

THE GRAPH MODEL (5)

What does it mean that the sites should be visited in the “shortest time”?

Different possibilities for the optimization function:

- Minimize the Total completion Time
- Minimize the Average Waiting Time
- Minimize the number of cycles
- ...
- Note: Minimize the Overall Energy Consumption (i.e. the total traversed distance) has no meaning...

10

THE GRAPH MODEL (7)

Similarities with many problems (cntd):

kTRPR k -Traveling Repairperson Problem with Reapirtimes

- given n points, construct k cycles, each starting at a common depot and together covering all the n points 😊

Calling the *latency* of a point the distance traveled (or the time elapsed) before visiting that point:





- objective: minimize the sum of all latencies 😊
- no battery constraint 😞

12

THE GRAPH MODEL (8)

Similarities with many problems (cntd):

mTRPD multiple Traveling Repairperson Problem with Distance Constraints


- k repairpersons have all together to visit all the n customers
- they are not allowed to traverse a distance longer than a predetermined limit; 
- Objective: minimize the total waiting time of all customers 
- No repair times and not trivial to extend a solution by just adding them  
- no. of cycles fixed to k

13

THE GRAPH MODEL (10)

Similarities with many problems (cntd):

variants of **VRP** vehicle routing problem


- Similar to mTRPD but there usually is a constraint on the number of visited customers per vehicle 

15

THE GRAPH MODEL (9)

Similarities with many problems (cntd):

variants of **VRP** vehicle routing problem




- Similar to mTRPD but there is usually a constraint on the number of visited customers per vehicle 

14

THE GRAPH MODEL (11)

Similarities with many problems (cntd):

TOP team orienteering problem

- equivalent to the first round of our problem 
- Objective: maximize the no. of covered sites 
- Repeat many times until all sites have been covered does not seem a good idea... 
- **NOTE:** From all these similarities we deduce that the problem is NP-hard and we cannot exploit any known result...

16

CONNECTION WITH RMCCP (1)

[C. & Tavernelli'19]

- o A **cycle cover** $\mathcal{C} = \{C_1, \dots, C_k\}$ for the site set V is a set of cycles s.t. each location of V belongs to at least one cycle.
- o Given a fixed value $x \geq 0$, an **x -bounded cycle cover** is a cycle cover in which each cycle C has $\text{cost}(C) \leq x$.
- o A **rooted cycle** C is a cycle where $v_0 \in C$. A **rooted cycle cover** is a cycle cover whose cycles are rooted cycles.
- o The **completion time of a (rooted) cycle cover** \mathcal{C} is $ct(\mathcal{C}) = \max \text{cost}(C)$ on all $C \in \mathcal{C}$.

17

CONNECTION WITH RMCCP (3)

RMCCP and our problem are tightly connected:

- o **Thm.** If RMCCP can be approximated within α , our problem can be approximated within $5\alpha + 1$ (if the optimum solution has completion exceeding b).
- On the other hand:
- o **Thm.** If our problem can be approximated within γ , then RMCCP can be approximated within $2\gamma + 1$.

19

CONNECTION WITH RMCCP (2)

- o RMCCP (Minimum Bounded Rooted Cycle Cover Problem) requires to find, if it exists, a bounded rooted cycle cover of minimum cardinality.
- o **Definition.** RMCCP:
Input: $\langle G, v_0, d, x \rangle$ where $G = (V, E)$ is a graph, $v_0 \in V$ is called root, d is a distance defined on E and x is a positive number
Output: an x -bounded rooted cycle cover of minimum cardinality, if it exists.
- o RMCCP has been proved to be approximable first within $O(\log x)$ [Nagarajan & Ravi '12] and then within $O(\frac{\log x}{\log \log x})$ [Friggstad & Swamy '14].

18

CONNECTION WITH RMCCP (4)

- o In other words, our problem inherits the hardness of RMCCP. Notice that whether RMCCP admits a constant approximation algorithm or not is one of the major open problems in this area.
- o **Note.** although RMCCP and our problem are so tightly connected, they are rather different, indeed the first one minimizes the number of cycles, while the second one the completion time.

20

CONNECTION WITH RMCCP (5)

All these results are true in general...

Special case:

- If $w(v_0, v_i) \leq xb$, where x is a fixed constant in the open interval $(0, 1/2)$, then our problem can be approximated within a constant.

21

MONITORING AN AREA BY UAVS (1)


So, we cannot exploit other problems and we study it by itself, going in several possible directions [C. & Dell'Orefice '18]:

1. due to its NP-hardness, approximate algorithms based on three main pahses:
 - clustering/matroid theory (greedy)
 - approximating TSP
 - scheduling/bin packing
2. MILP formulation
3. reduction of the dimension of the problem

22

MONITORING AN AREA BY UAVS (2)


1. approximate algorithms based on three main pahses:
 - clustering: the idea is to partition the sites so that each set can be covered within battery B .

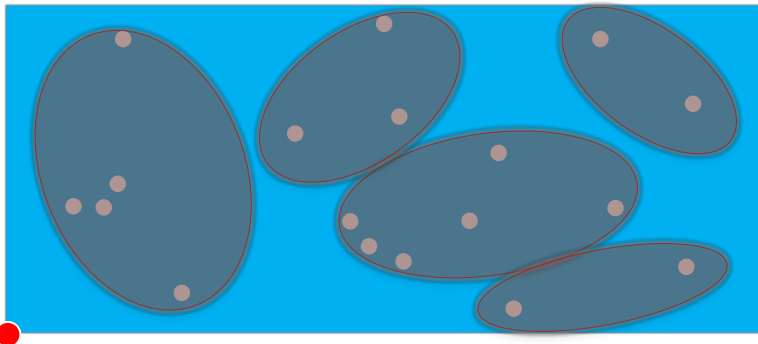

23

MONITORING AN AREA BY UAVS (3)


- approximating TSP: constructing a cycle covering all sites in each cluster (in fact performed together with the clustering, to guarantee the battery constraint)

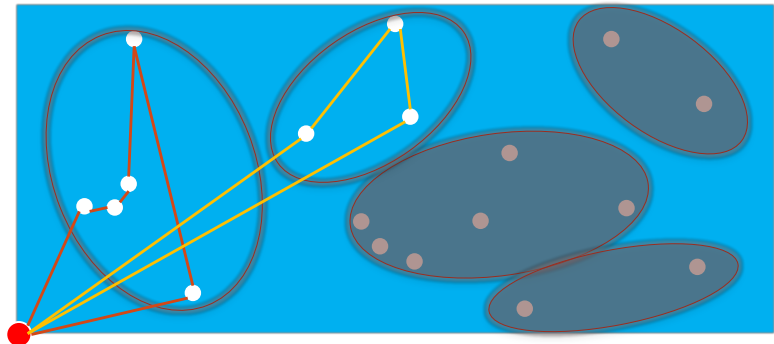

245

MONITORING AN AREA BY UAVS (4)

- scheduling: all cycles must be distributed to UAVs so to guarantee min completion time or min latency
- bin packing: when the order is not important



25

MONITORING AN AREA BY UAVS (5)

Each one of the three phases can be implemented in several ways providing different solutions...

Problem 1: compare all the provided solutions in terms of goodness

26

MONITORING AN AREA BY UAVS (6)

Instead of clustering sites, we can:

- enumerate all possible cycles passing through the depot that can be covered within battery B
- solve a min set cover.

Exploiting the fact that this system is a matroid, a greedy approach guarantees a very good approximation ratio but...

The no. of enumerated cycles is exponential in general...

Problem 2: reduce the space of the cycles so that the approximation ratio does not increase too much

27

MONITORING AN AREA BY UAVS (7)

2. Provide a MILP formulation in order to compare optimum solutions of (small) instances with the approximate ones:
 - in the graph model, the depot is transformed into two nodes, v_o^s and v_o^t and the graph is oriented
 - define a variable family x_{ij}^k , $i, j=0, \dots, n$, $k=1, \dots, c$ such that it is =1 iff edge (i, j) is used by cycle k
 - define a variable family z_i^k , $i=0, \dots, n$, $k=1, \dots, c$ such that it is =1 iff cycle k passes through node i
 - ...

28

MONITORING AN AREA BY UAVS (8)

2. Provide a MILP formulation (cntd)

constraints:

- $\sum_{k=1}^c z_i^k \geq 1, \forall i = 1, \dots, n$ (every site visited at least once)
- $\sum_{(v_i, v_j) \in E} w(v_i, v_j) x_{ij}^k + \sum_{i=1}^n t_i z_i^k \leq B, \forall k = 1, \dots, c$ (battery constraint)
- $x_{ij}^k \leq z_i^k \forall (v_i, v_j) \in E, \forall k = 1, \dots, c$ (the k -th cycle passes through site i iff it is in fact assigned to it)
- $\sum_{i=0}^n x_{ij}^k = 1 \forall j, k$ (only 1 edge per cycle enters in v_j)
- $\sum_{j=0}^n x_{ij}^k = 1 \forall i, k$ (only 1 edge per cycle comes out from v_j)
- ...

29

MONITORING AN AREA BY UAVS (9)

2. Provide a MILP formulation (cntd)

constraints (cntd):

- $\sum_{j=1}^n x_{0j}^k = 1$ and $\sum_{i=1}^n x_{i0}^k = 1 \forall k = 1, \dots, c$ (all c cycles go out from v_0^s and enter in v_0^t)
- subtour elimination constraints
- Objective: minimize c [usually to avoid...]
- **NOTE:** this formulation solves only the first two phases: the scheduling/bin packing is missing...

Problem 3: provide a correct and complete formulation...


30

MONITORING AN AREA BY UAVS (10)

3. Reduction of the dimension of the instance:

Property 1: if $\exists i$ s.t. $2w(v_0, v_i) + t_i = B$

\Rightarrow cycle $v_0 - v_i - v_0$ is in every solution.

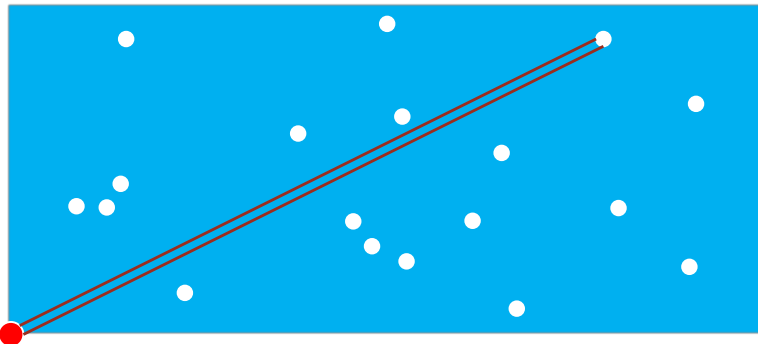


31

MONITORING AN AREA BY UAVS (11)

3. Reduction of the dimension of the instance (cntd):

Property 2: if $\forall i$ it holds $w(v_0, v_i) + t_i + w(v_i, v_j) + t_j + w(v_j, v_0) > B$

\Rightarrow cycle $v_0 - v_j - v_0$ is in every solution.

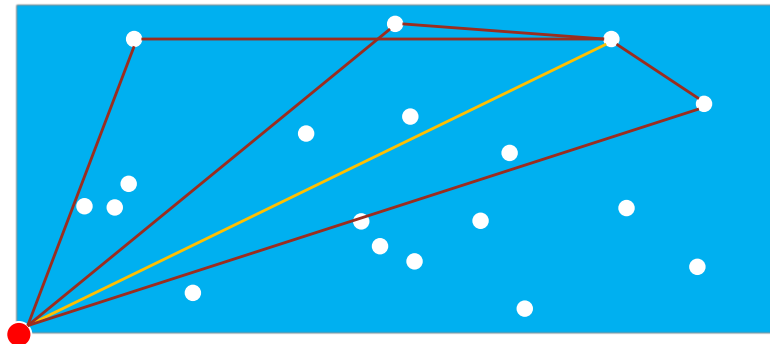


32

MONITORING AN AREA BY UAVS (12)

3. Reduction of the dimension of the instance (cntd):

Property 3: if $\exists i, j$ s.t. $w(v_0, v_i) + t_i + w(v_i, v_j) + t_j + w(v_j, v_0) > B$
 \Rightarrow edge (v_i, v_j) cannot enter in any solution.

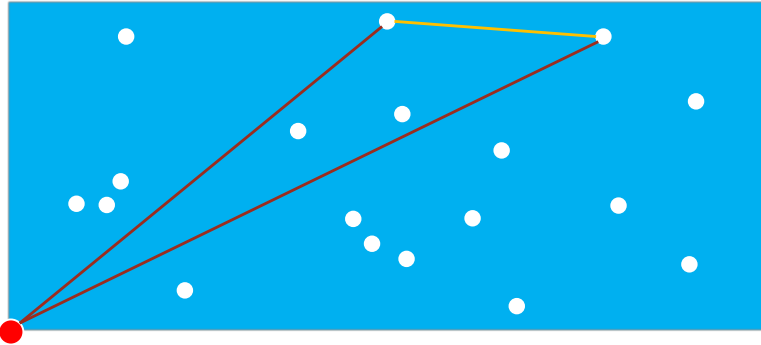

33

MONITORING AN AREA BY UAVS (13)

3. Reduction of the dimension of the instance (cntd):

The main idea is that, before solving our problem on the given instance, we can reduce its dimension by forcing to be inside the solution the edges indicated by Properties 1 and 2, and to be outside the solution the edges indicated by Property 3.

Problem 4: given a general (e.g. random, real life, etc.) instance, how much can we expect to reduce its dimension?

34

OPEN PROBLEMS

- determining a tight approx ratio
- introducing cooperation
- introducing some “emergency criteria” able to dynamically change the UAVs’ behaviour (what if an injured person is detected? Shall we wait until the UAV is back?)
- ...

35