


Chapter 5

Data Link Layer

Reti degli Elaboratori
Canale AL
Prof.ssa Chiara Petrioli
a.a. 2014/2015

We thank for the support material Prof. Kurose-Ross
All material copyright 1996-2012
© J.F Kurose and K.W. Ross, All Rights Reserved

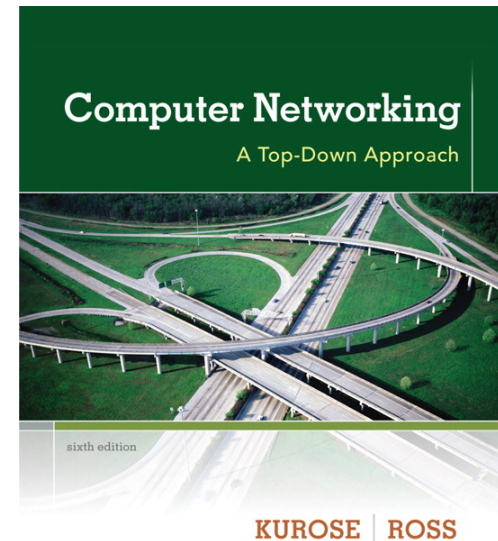

*Computer
Networking: A Top
Down Approach*
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012


Link Layer

- ❑ 5.1 Introduction and services
- ❑ 5.2 Error detection and correction
- ❑ 5.3 Multiple access protocols
- ❑ 5.4 Link-layer Addressing
- ❑ 5.5 Ethernet
- ❑ 5.6 Link-layer switches, LANs, VLANs
- ❑ 5.7 PPP
- ❑ 5.8 Link virtualization: MPLS
- ❑ 5.9 A day in the life of a web request

Hubs

... physical-layer (“dumb”) repeaters:

- bits coming in one link go out *all* other links at same rate
- all nodes connected to hub can collide with one another
- no frame buffering
- no CSMA/CD at hub: host NICs detect collisions

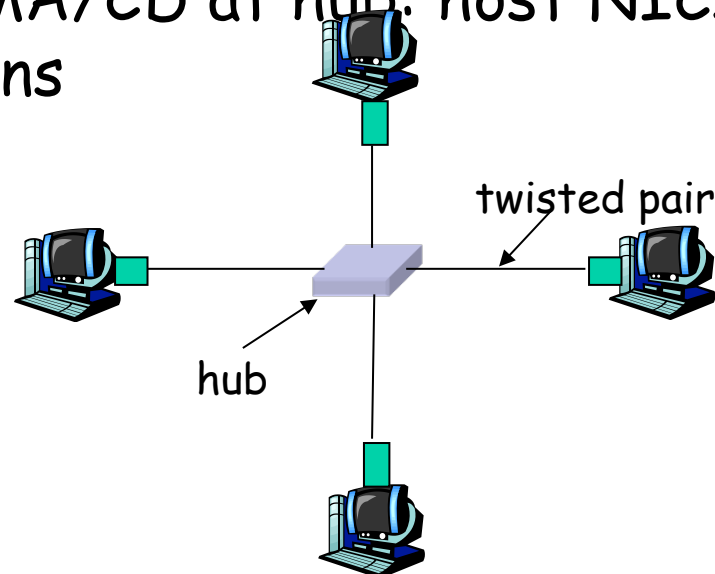

Hubs

...hierarchical organization of department LANs via Hub, pros and cons


- Extends size of the network
- Interconnects LANs
- Reduces the aggregate throughput of LANs (single collision domain)
- Homogeneous Ethernet technologies (no buffering of frames)

Switches and Bridges

- ❑ link-layer device: smarter than hubs, take *active* role
 - store, forward Ethernet frames
 - examine incoming frame's MAC address, *selectively* forward frame to one-or-more outgoing links when frame is to be forwarded on segment, uses CSMA/CD to access segment
 - Solves the cons of interconnection via Hubs
- ❑ *transparent*
 - hosts are unaware of presence of switches
- ❑ *plug-and-play, self-learning*
 - switches do not need to be configured

Bridge and Switch: allows multiple simultaneous transmissions


- ❑ hosts have dedicated, direct connection to switch
- ❑ switches buffer packets
- ❑ Ethernet protocol used on *each* incoming link, but no collisions; full duplex
 - each link is its own collision domain
- ❑ **switching:** A-to-A' and B-to-B' simultaneously, without collisions
 - not possible with dumb hub

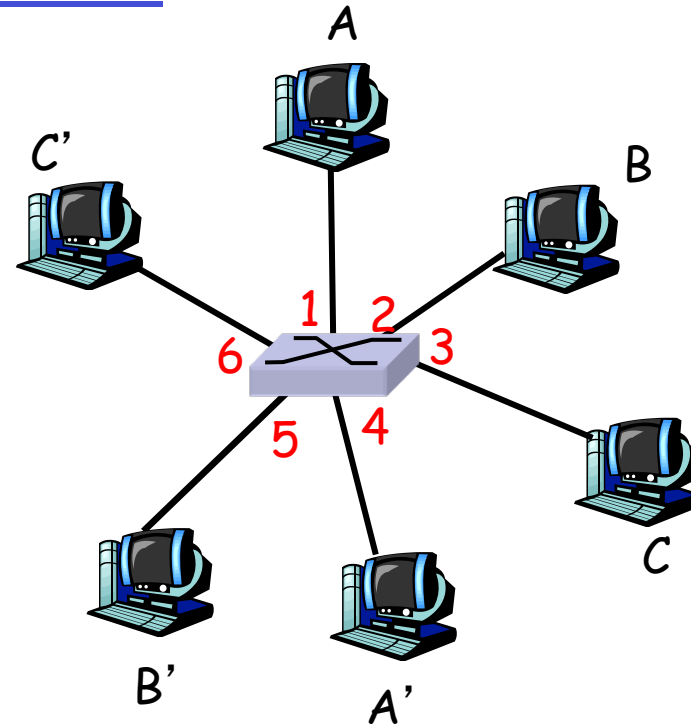

*switch with six interfaces
(1,2,3,4,5,6)*

Switch Table


- ❑ Q: how does switch know that A' reachable via interface 4, B' reachable via interface 5?
- ❑ A: each switch has a **switch table**, each entry:
 - (MAC address of host, interface to reach host, time stamp)
- ❑ looks like a routing table!
- ❑ Q: how are entries created, maintained in switch table?
 - something like a routing protocol?

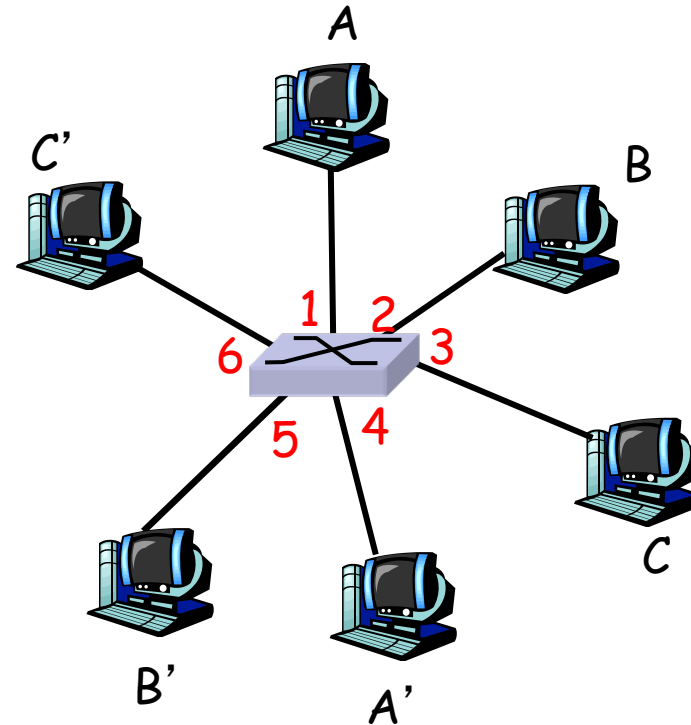

*switch with six interfaces
(1,2,3,4,5,6)*

Switch: self-learning

- switch *learns* which hosts can be reached through which interfaces
 - when frame received, switch “learns” location of sender: incoming LAN segment
 - records sender/location pair in switch table

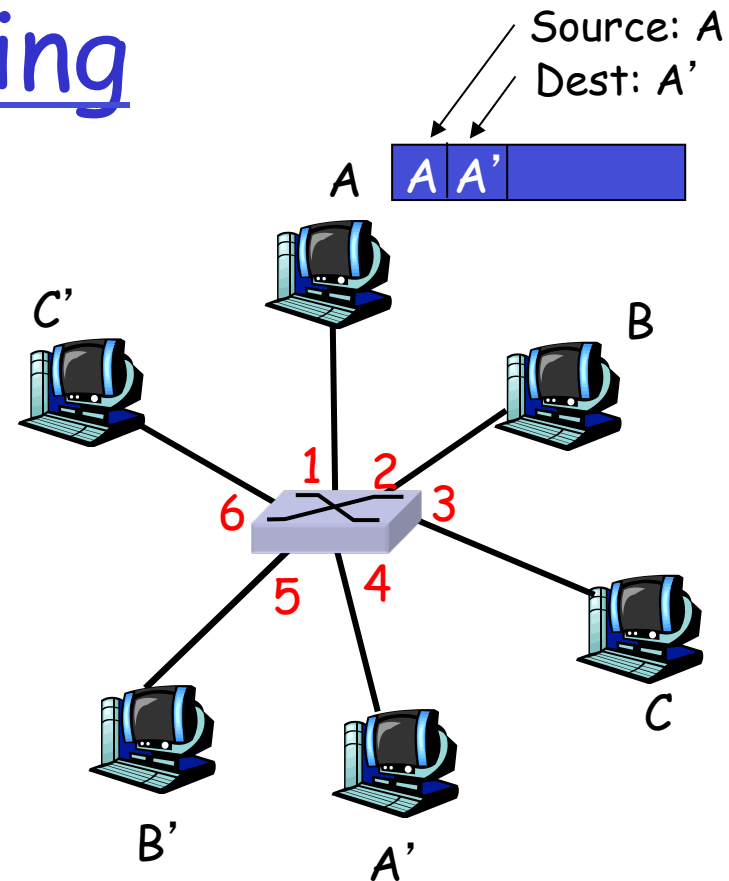

MAC addr	interface	TTL
A	1	60

*Switch table
(initially empty)*


Switch: frame filtering/forwarding

When frame received:

1. record link associated with sending host
 2. index switch table using MAC dest address
 3. **if** entry found for destination
 then {
 if dest on segment from which frame arrived
 then drop the frame
 else forward the frame on interface indicated
 }
 else flood
- forward on all but the interface
on which the frame arrived*

Self-learning, forwarding: example

- ❑ frame destination unknown: *flood*
- ❑ destination A location known: *selective send*

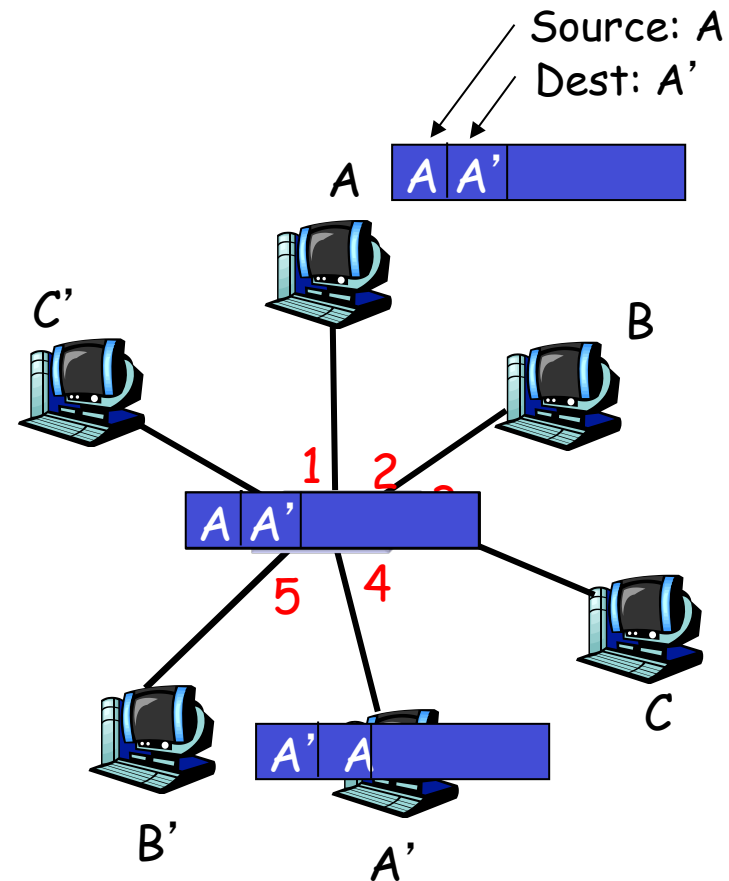


MAC addr	interface	TTL
A	1	60
A'	4	60

*Switch table
(initially empty)*

Interconnecting switches


- switches can be connected together

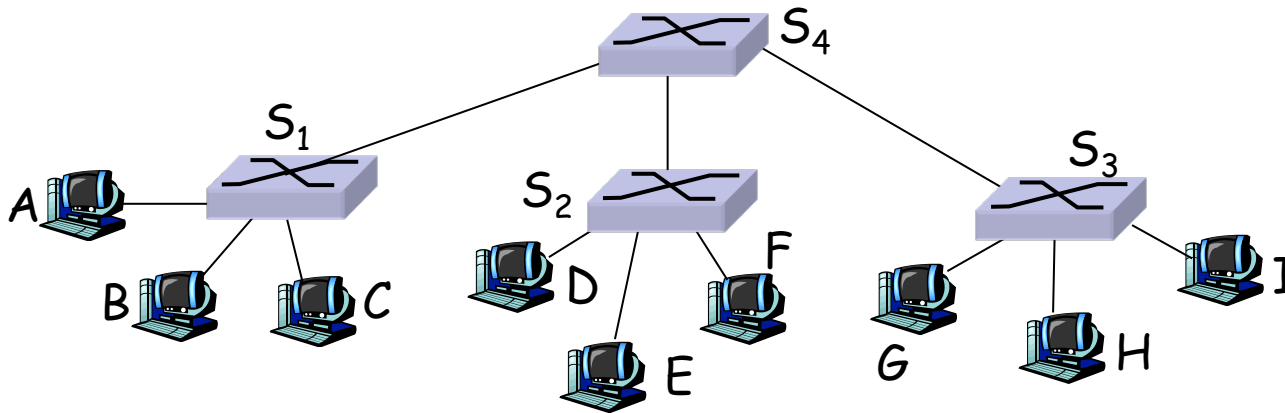

- Q: sending from A to G - how does S₁ know to forward frame destined to F via S₄ and S₃?
- A: self learning! (works exactly the same as in single-switch case!)


Self-learning multi-switch example

Suppose C sends frame to I, I responds to C

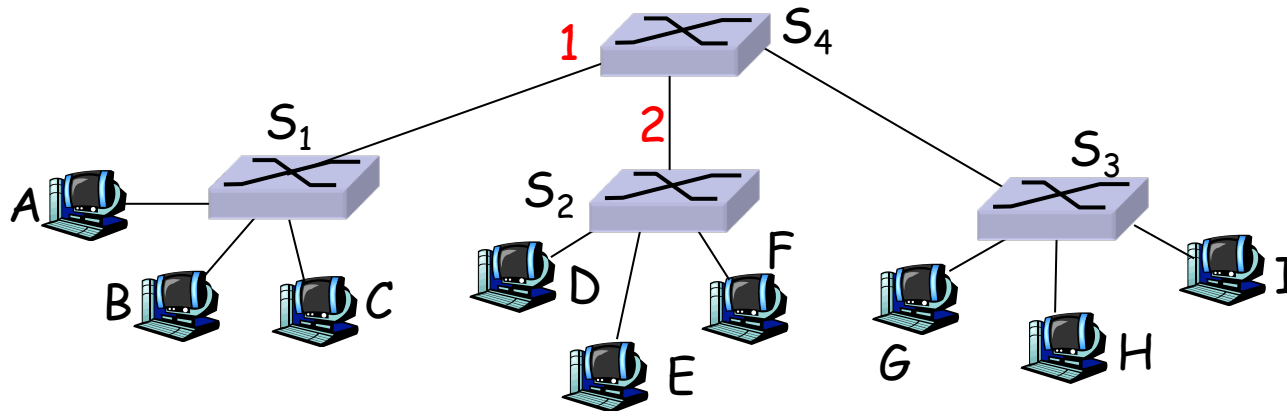

- Q: show switch tables and packet forwarding in S₁, S₂, S₃, S₄

Institutional network

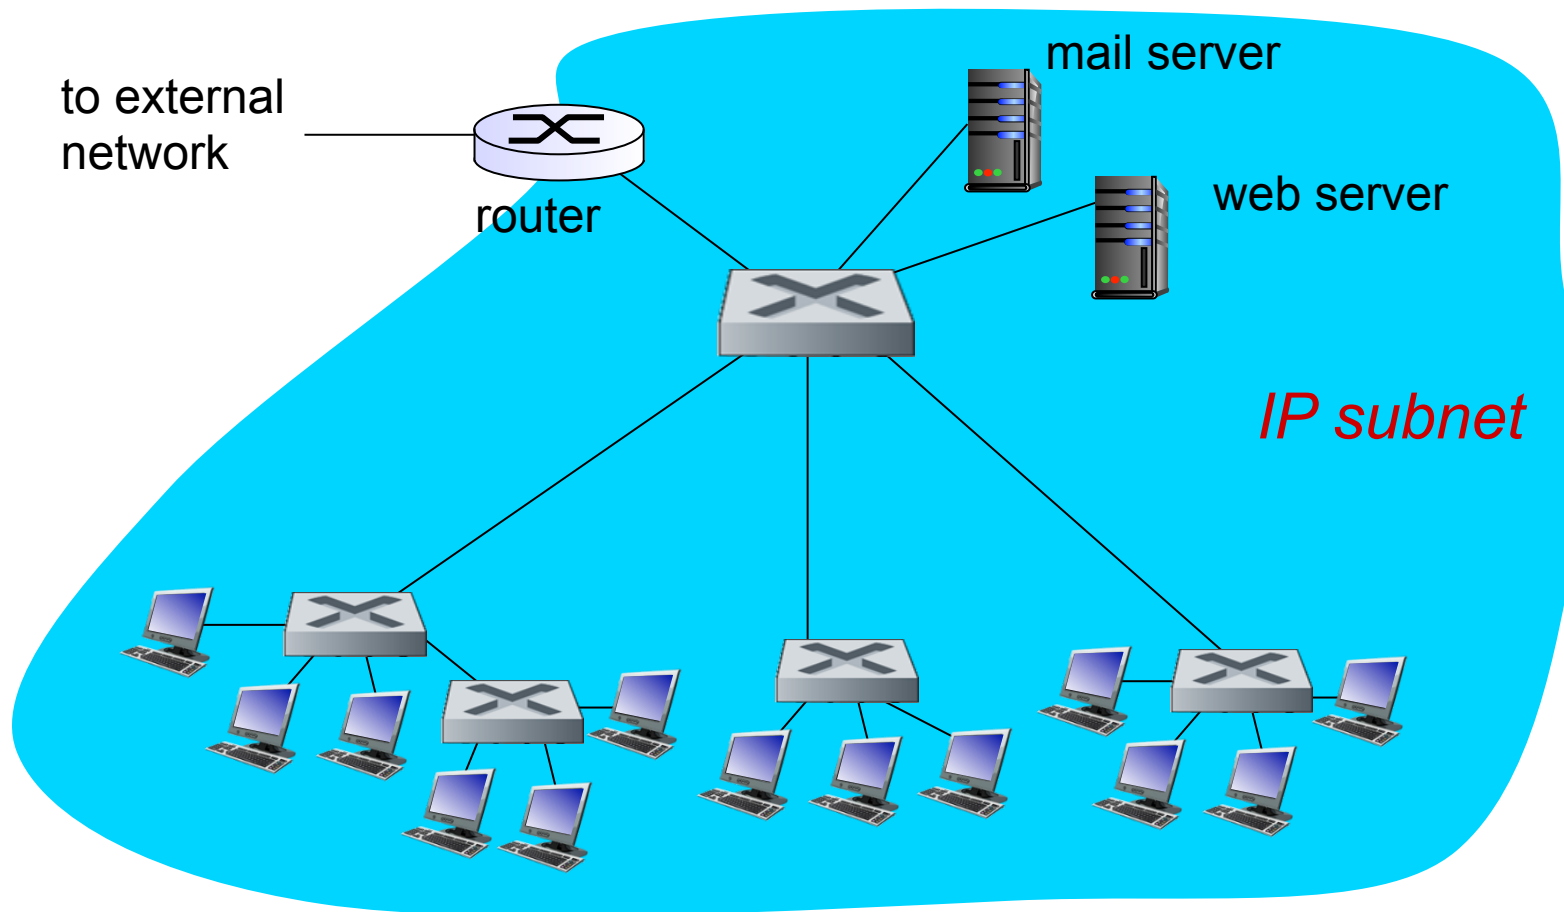


Switches vs. routers

both are store-and-forward:


- **routers:** network-layer devices (examine network-layer headers)
- **switches:** link-layer devices (examine link-layer headers)

both have forwarding tables:

- **routers:** compute tables using routing algorithms, IP addresses
- **switches:** learn forwarding table using flooding, learning, MAC addresses

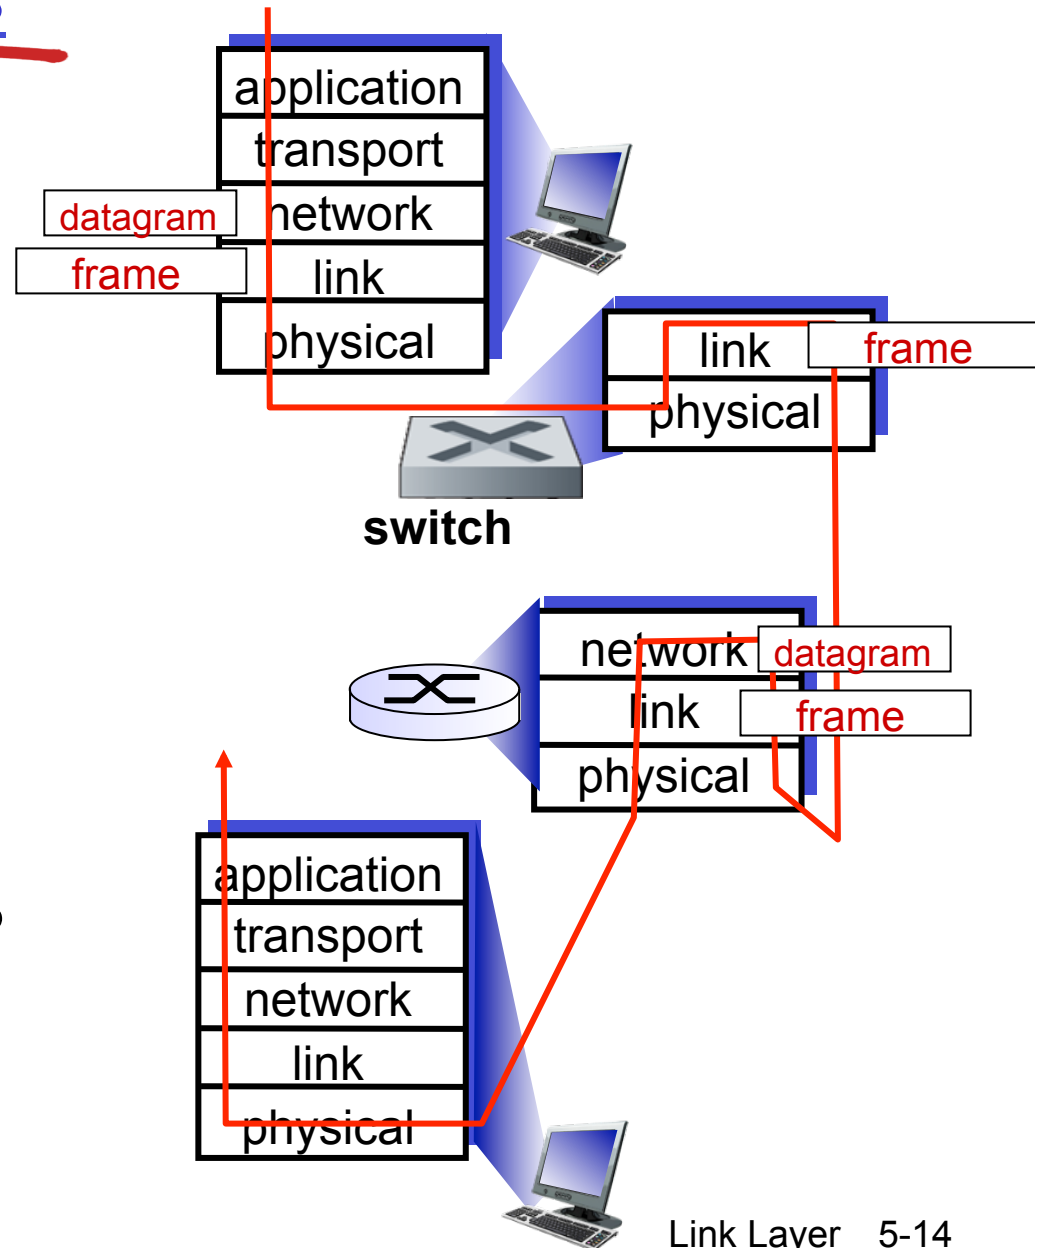

VLANs: motivation

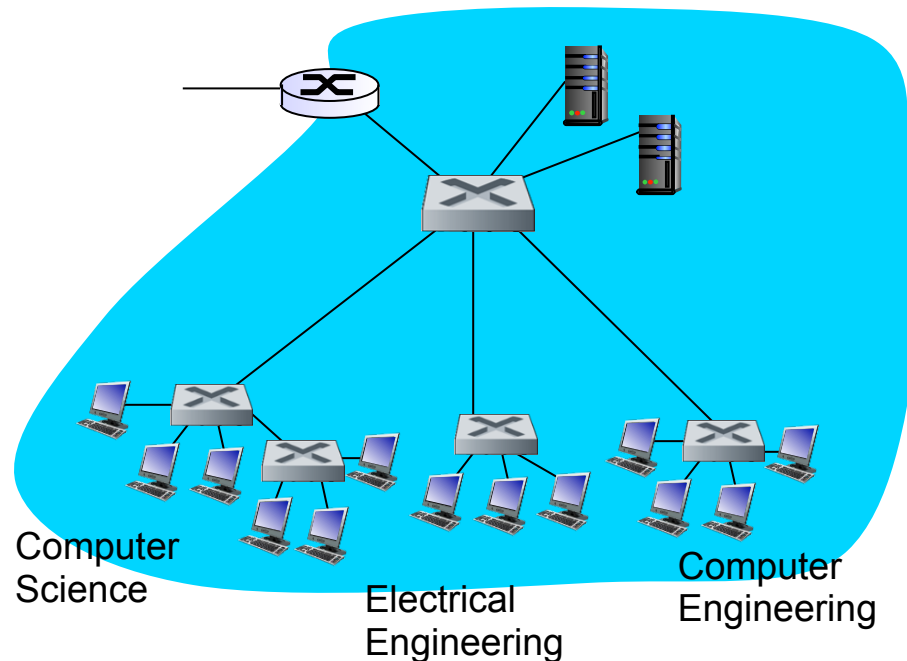

consider:


- ❑ CS user moves office to EE, but wants connect to CS switch?
- ❑ single broadcast domain:
 - all layer-2 broadcast traffic (ARP, DHCP, unknown location of destination MAC address) must cross entire LAN
 - security/privacy, efficiency issues

VLANs


Virtual Local Area Network

switch(es) supporting VLAN capabilities can be configured to define multiple *virtual* LANS over single physical LAN infrastructure.

port-based VLAN: switch ports grouped (by switch management software) so that *single* physical switch ...

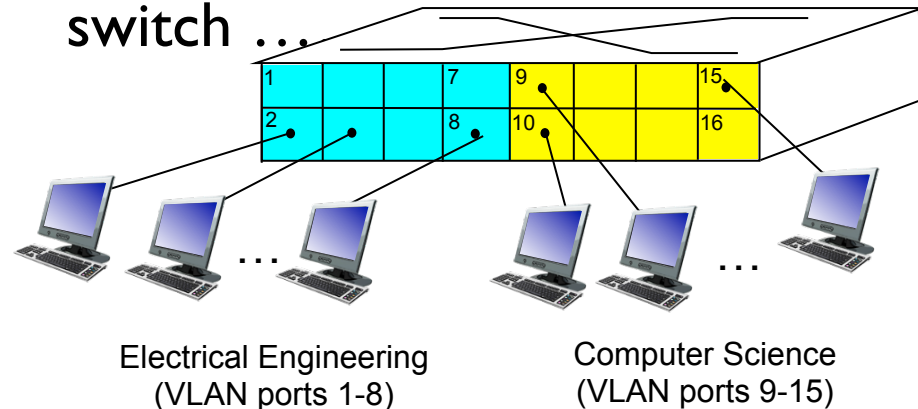


... operates as **multiple** virtual switches

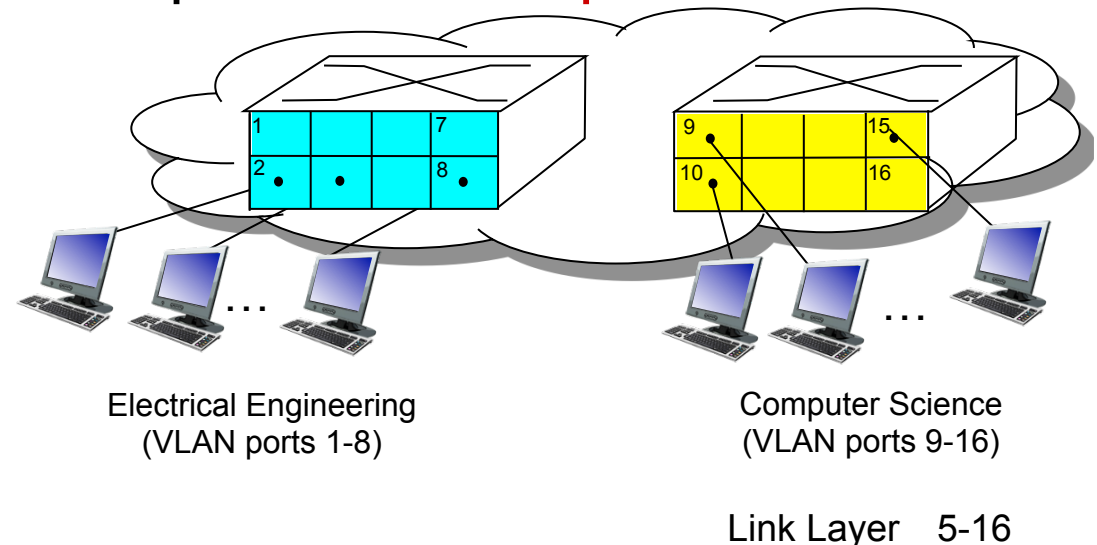


Port-based VLAN

- ❑ **traffic isolation:** frames to/from ports 1-8 can *only* reach ports 1-8
 - can also define VLAN based on MAC addresses of endpoints, rather than switch port
- ❖ **dynamic membership:** ports can be dynamically assigned among VLANs
- ❖ **forwarding between VLANs:** done via routing (just as with separate switches)
 - in practice vendors sell combined switches plus routers

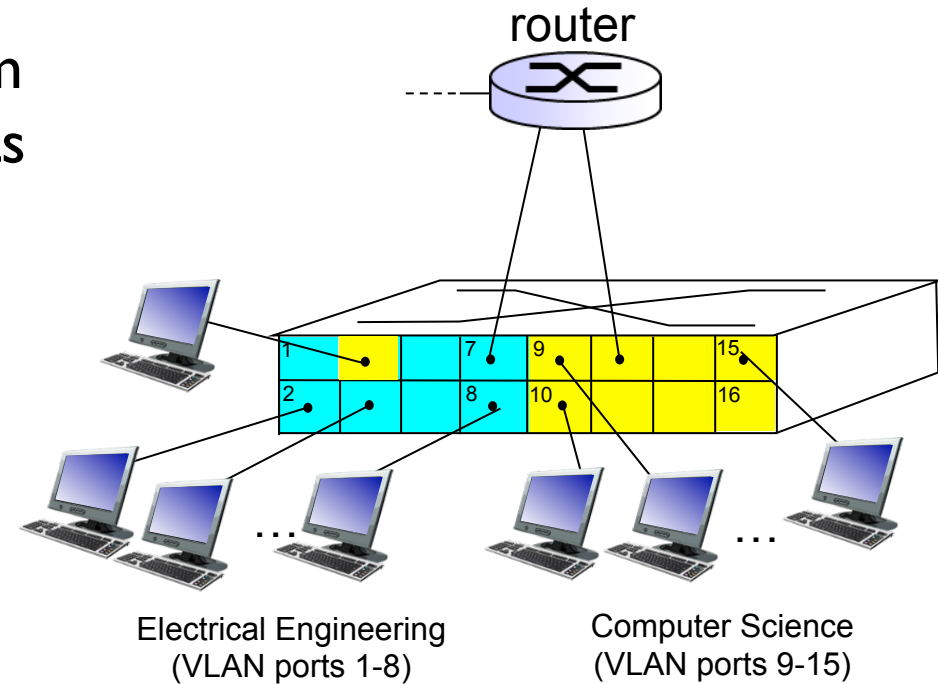


VLANs spanning multiple switches

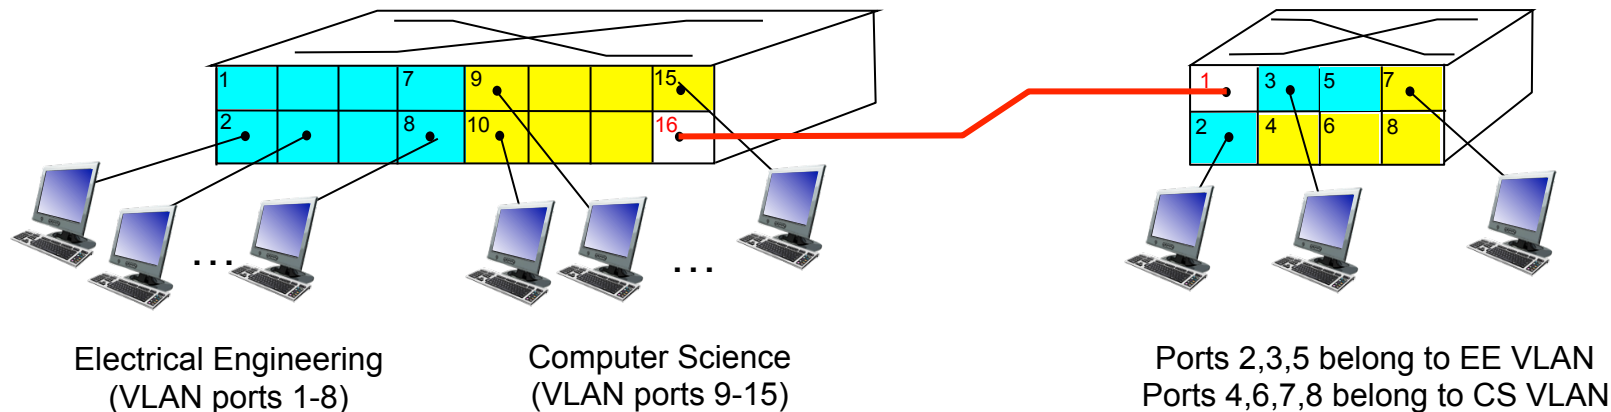


- ❑ **trunk port:** carries frames between VLANs defined over multiple physical switches
 - frames forwarded within VLAN between switches can't be vanilla 802.1 frames (must carry VLAN ID info)
 - 802.1q protocol adds/removed additional header fields for frames forwarded between trunk ports

802.1Q VLAN frame format

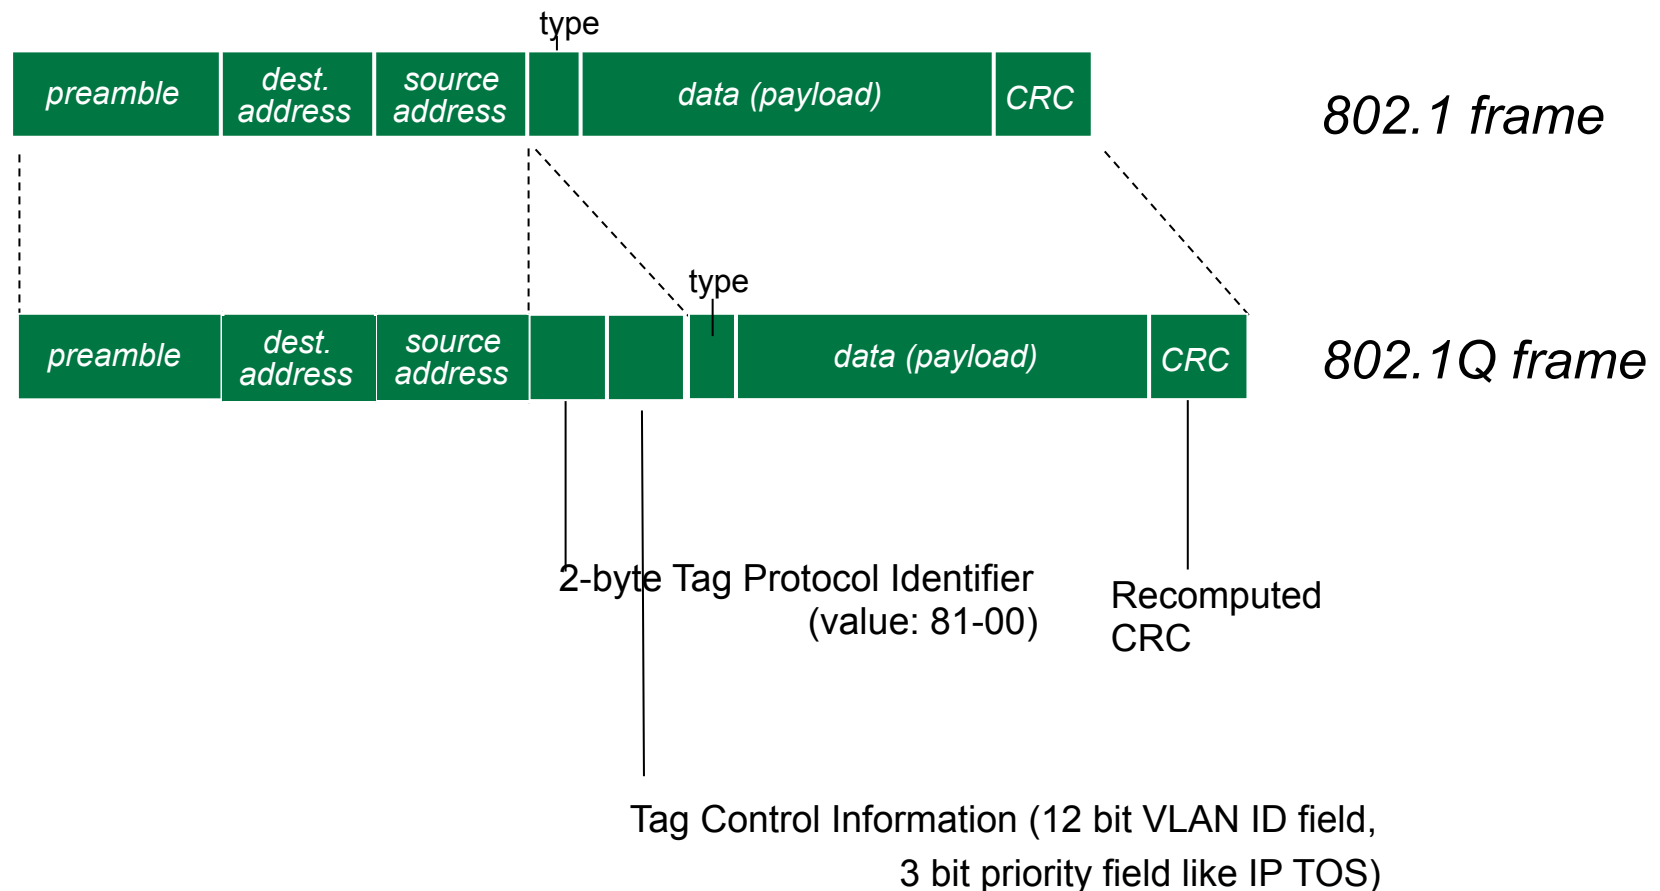

Data center networks

- ❑ 10's to 100's of thousands of hosts, often closely coupled, in close proximity:
 - e-business (e.g. Amazon)
 - content-servers (e.g., YouTube, Akamai, Apple, Microsoft)
 - search engines, data mining (e.g., Google)
- ❖ challenges:
 - multiple applications, each serving massive numbers of clients
 - managing/balancing load, avoiding processing, networking, data bottlenecks

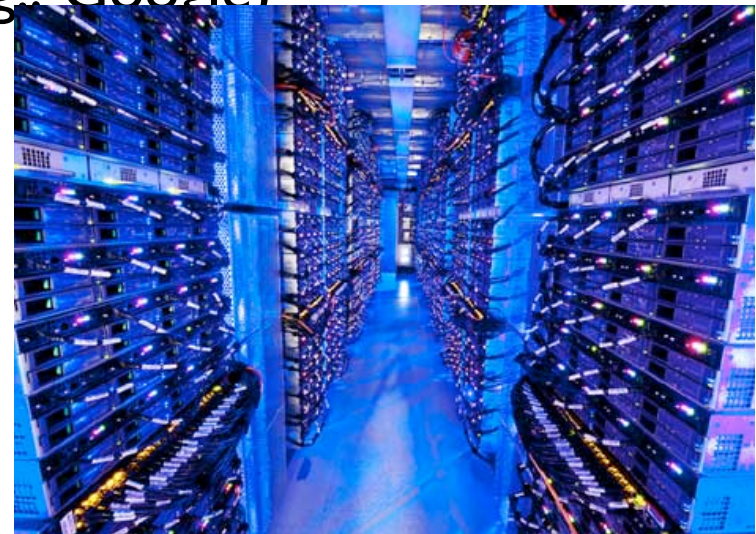


Inside a 40-ft Microsoft container,
Chicago data center

Data center networks


load balancer: application-layer routing

- receives external client requests
- directs workload within data center
- returns results to external client (hiding data center internals from client)

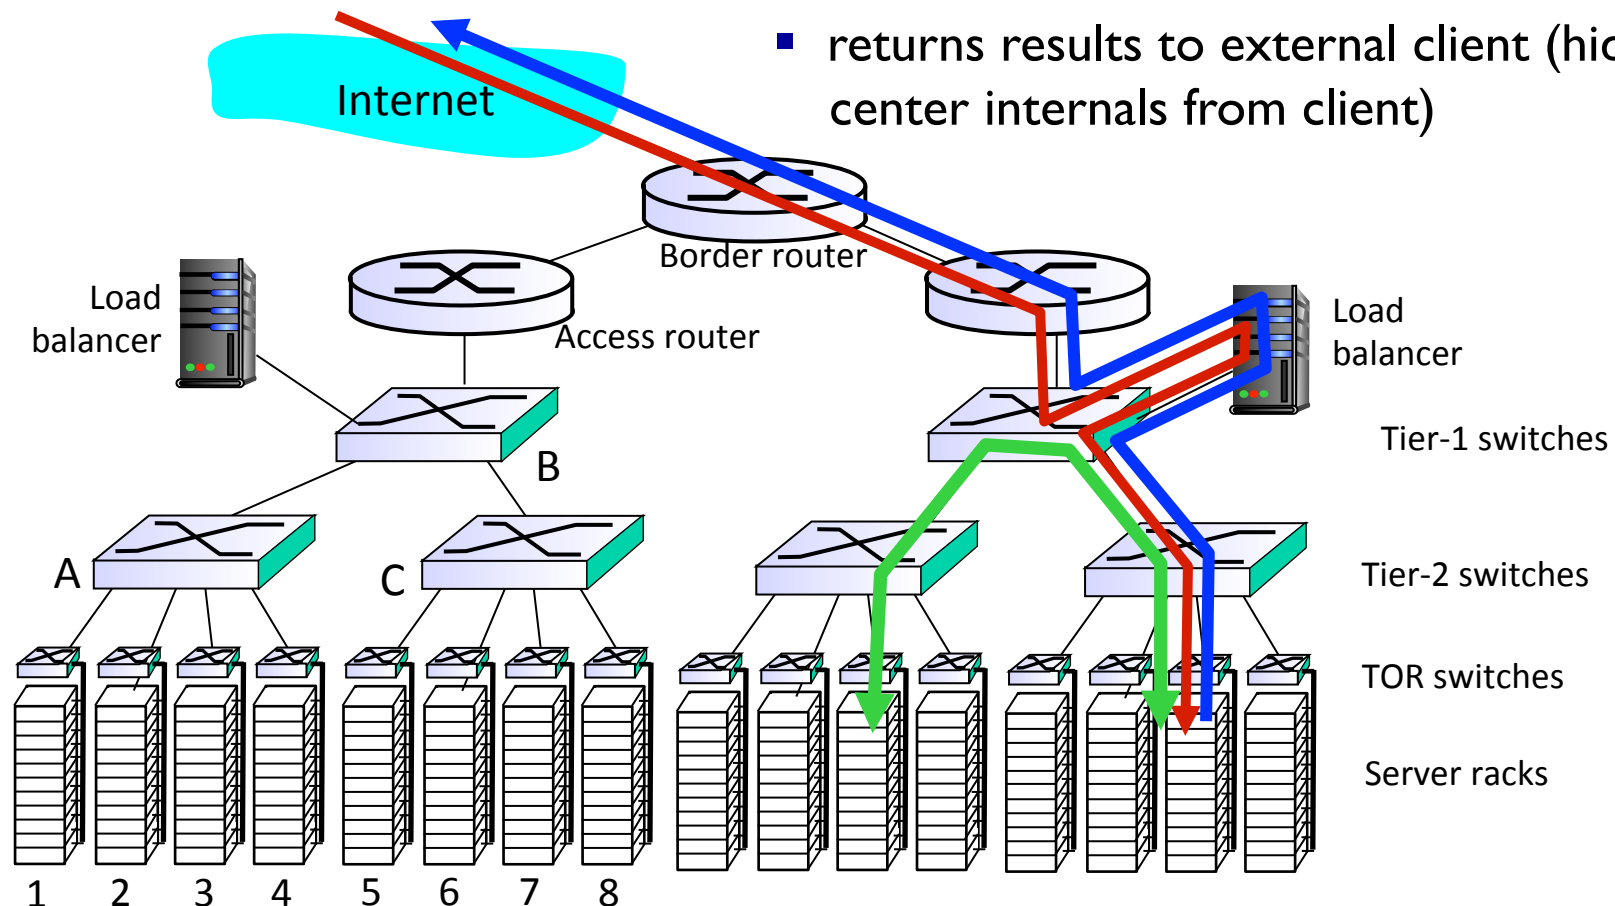

Data center networks

- ❖ rich interconnection among switches, racks:
 - increased throughput between racks (multiple routing paths possible)
 - increased reliability via redundancy

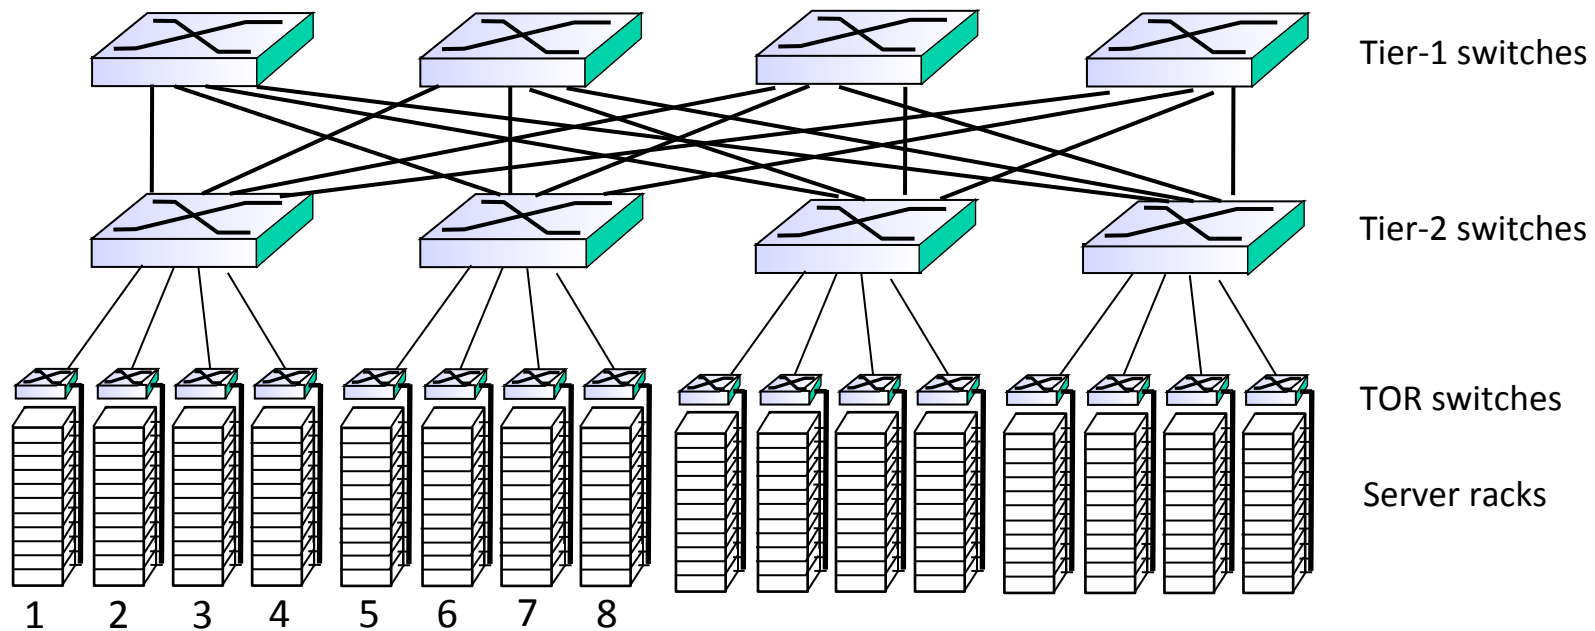

Link Layer

- ❑ 5.1 Introduction and services
- ❑ 5.2 Error detection and correction
- ❑ 5.3 Multiple access protocols
- ❑ 5.4 Link-Layer Addressing
- ❑ 5.5 Ethernet
- ❑ 5.6 Link-layer switches
- ❑ 5.7 PPP
- ❑ 5.8 Link virtualization: MPLS
- ❑ 5.9 A day in the life of a web request

Point to Point Data Link Control

- ❑ one sender, one receiver, one link: easier than broadcast link:
 - no Media Access Control
 - no need for explicit MAC addressing
 - e.g., dialup link, ISDN line
- ❑ popular point-to-point DLC protocols:
 - PPP (point-to-point protocol)
 - HDLC: High level data link control (Data link used to be considered “high layer” in protocol stack!)

PPP Design Requirements [RFC 1557]

- ❑ **packet framing:** encapsulation of network-layer datagram in data link frame
 - carry network layer data of any network layer protocol (not just IP) *at same time*
 - ability to demultiplex upwards
- ❑ **bit transparency:** must carry any bit pattern in the data field
- ❑ **error detection** (no correction)
- ❑ **connection liveness:** detect, signal link failure to network layer
- ❑ **network layer address negotiation:** endpoint can learn/configure each other's network address


PPP non-requirements

- ❑ no error correction/recovery
- ❑ no flow control
- ❑ out of order delivery OK
- ❑ no need to support multipoint links (e.g., polling)

Error recovery, flow control, data re-ordering
all relegated to higher layers!


PPP Data Frame

- ❑ **Flag:** delimiter (framing)
- ❑ **Address:** does nothing (only one option)
- ❑ **Control:** does nothing; in the future possible multiple control fields
- ❑ **Protocol:** upper layer protocol to which frame delivered (eg, PPP-LCP, IP, IPCP, etc)

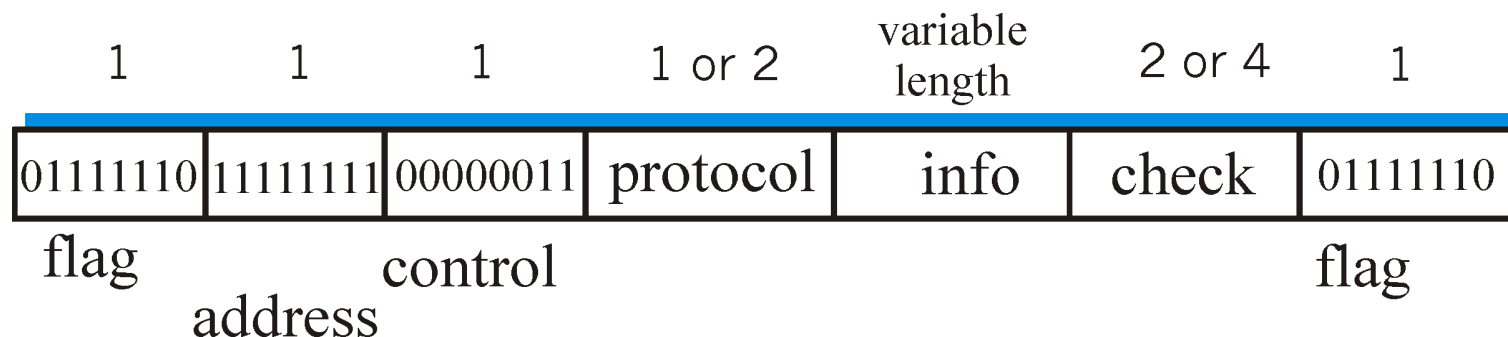

PPP Data Frame


- **info**: upper layer data being carried
- **check**: cyclic redundancy check for error detection

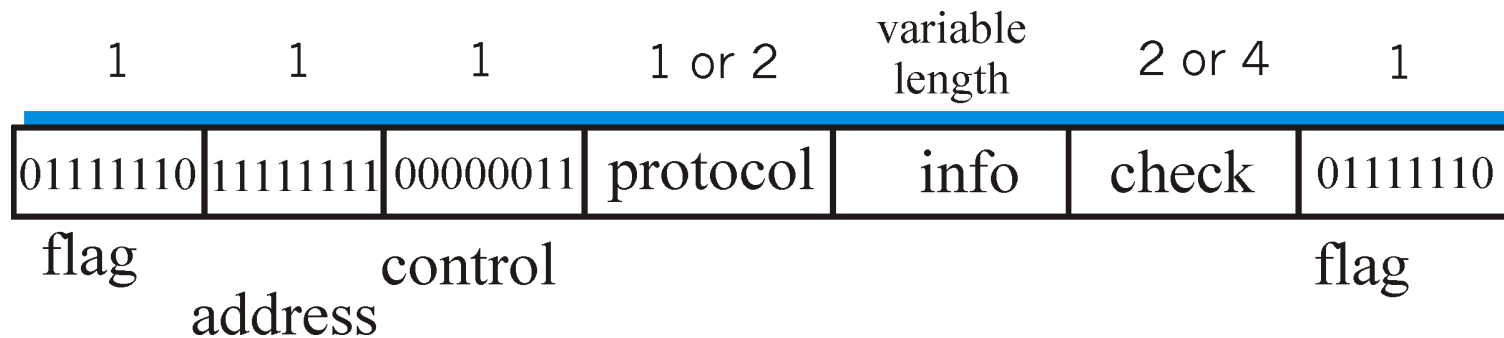

Byte Stuffing

- ❑ “data transparency” requirement: data field must be allowed to include flag pattern <01111110>
 - Q: is received <01111110> data or flag?
- ❑ **Sender:** adds (“stuffs”) extra < 01111101> byte after each < 01111110> *data* byte
- ❑ adds extra < 01111101> for each < 01111101> occurrence
- ❑ **Receiver:**
 - two 0111111001111101 bytes : discard second byte, continue data reception
 - single 01111110: flag byte


Byte Stuffing

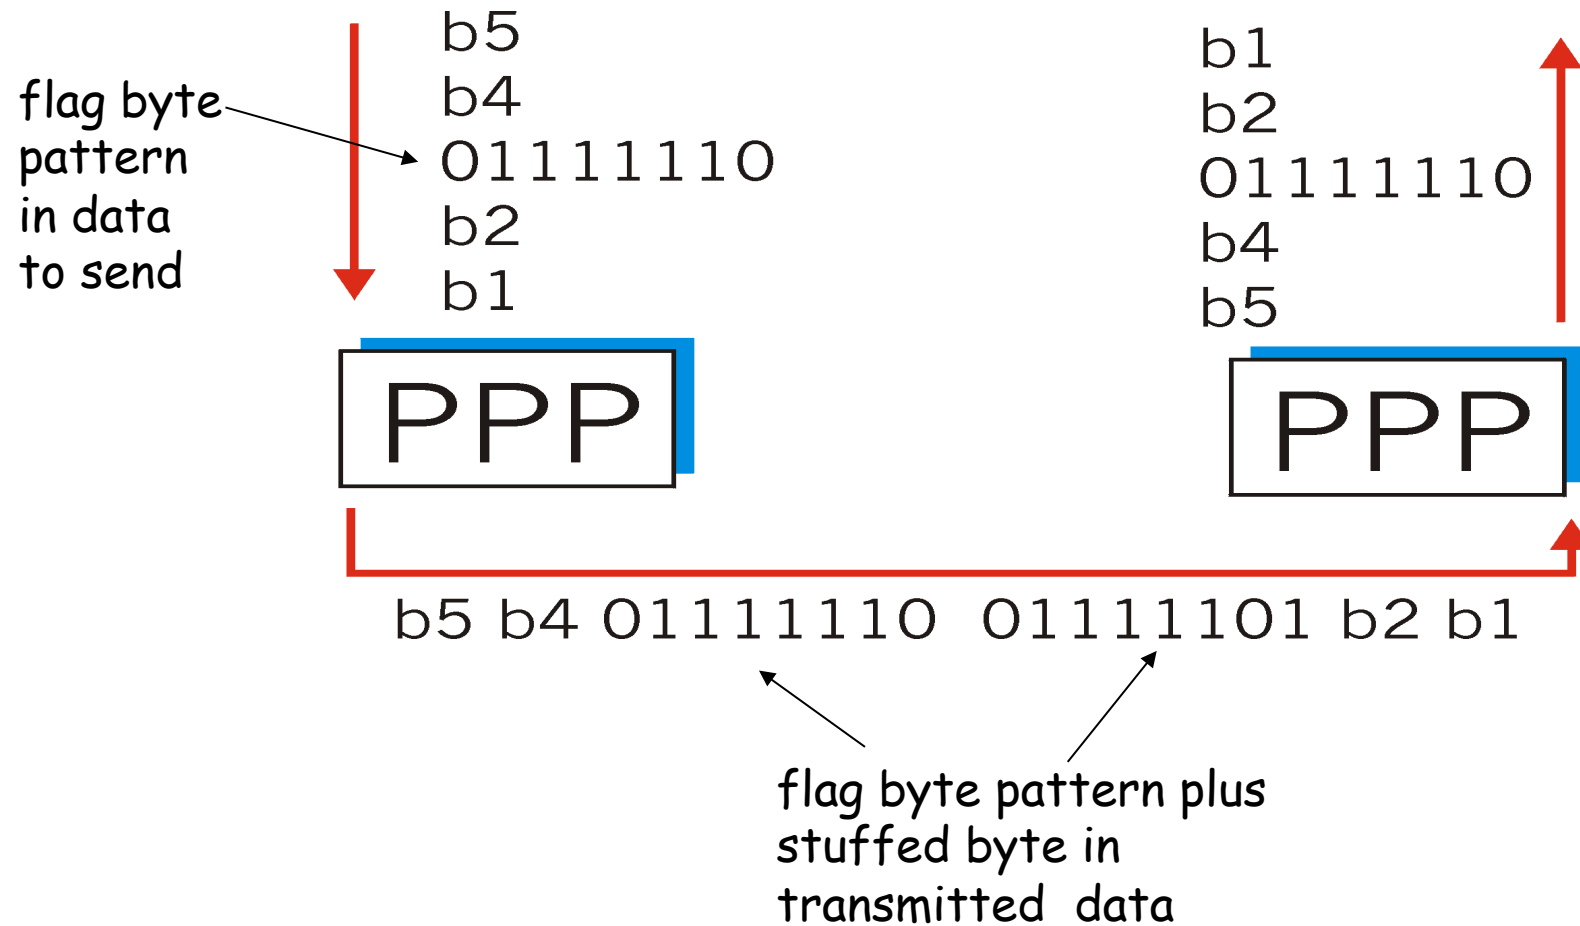

PPP Data Control Protocol

Before exchanging network-layer data, data link peers must

- ❑ **configure PPP link** (max. frame length, authentication)
- ❑ **learn/configure network** layer information
 - for IP: carry IP Control Protocol (IPCP) msgs (protocol field: 8021) to configure/learn IP address

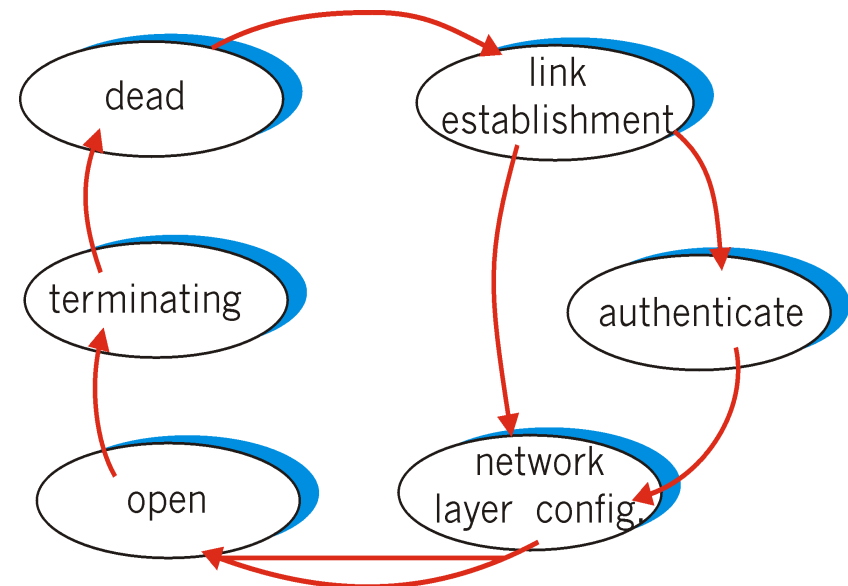

Link layer, LANs: outline

5.1 introduction, services

5.2 error detection,
correction

5.3 multiple access
protocols

5.4 LANs

- addressing, ARP
- Ethernet
- switches
- VLANs

5.5 link virtualization:
MPLS


5.6 data center
networking

5.7 a day in the life of a
web request


Synthesis: a day in the life of a web request

- ❑ journey down protocol stack complete!
 - application, transport, network, link
- ❑ putting-it-all-together: synthesis!
 - *goal*: identify, review, understand protocols (at all layers) involved in seemingly simple scenario: requesting www page
 - *scenario*: student attaches laptop to campus network, requests/receives www.google.com

A day in the life: scenario

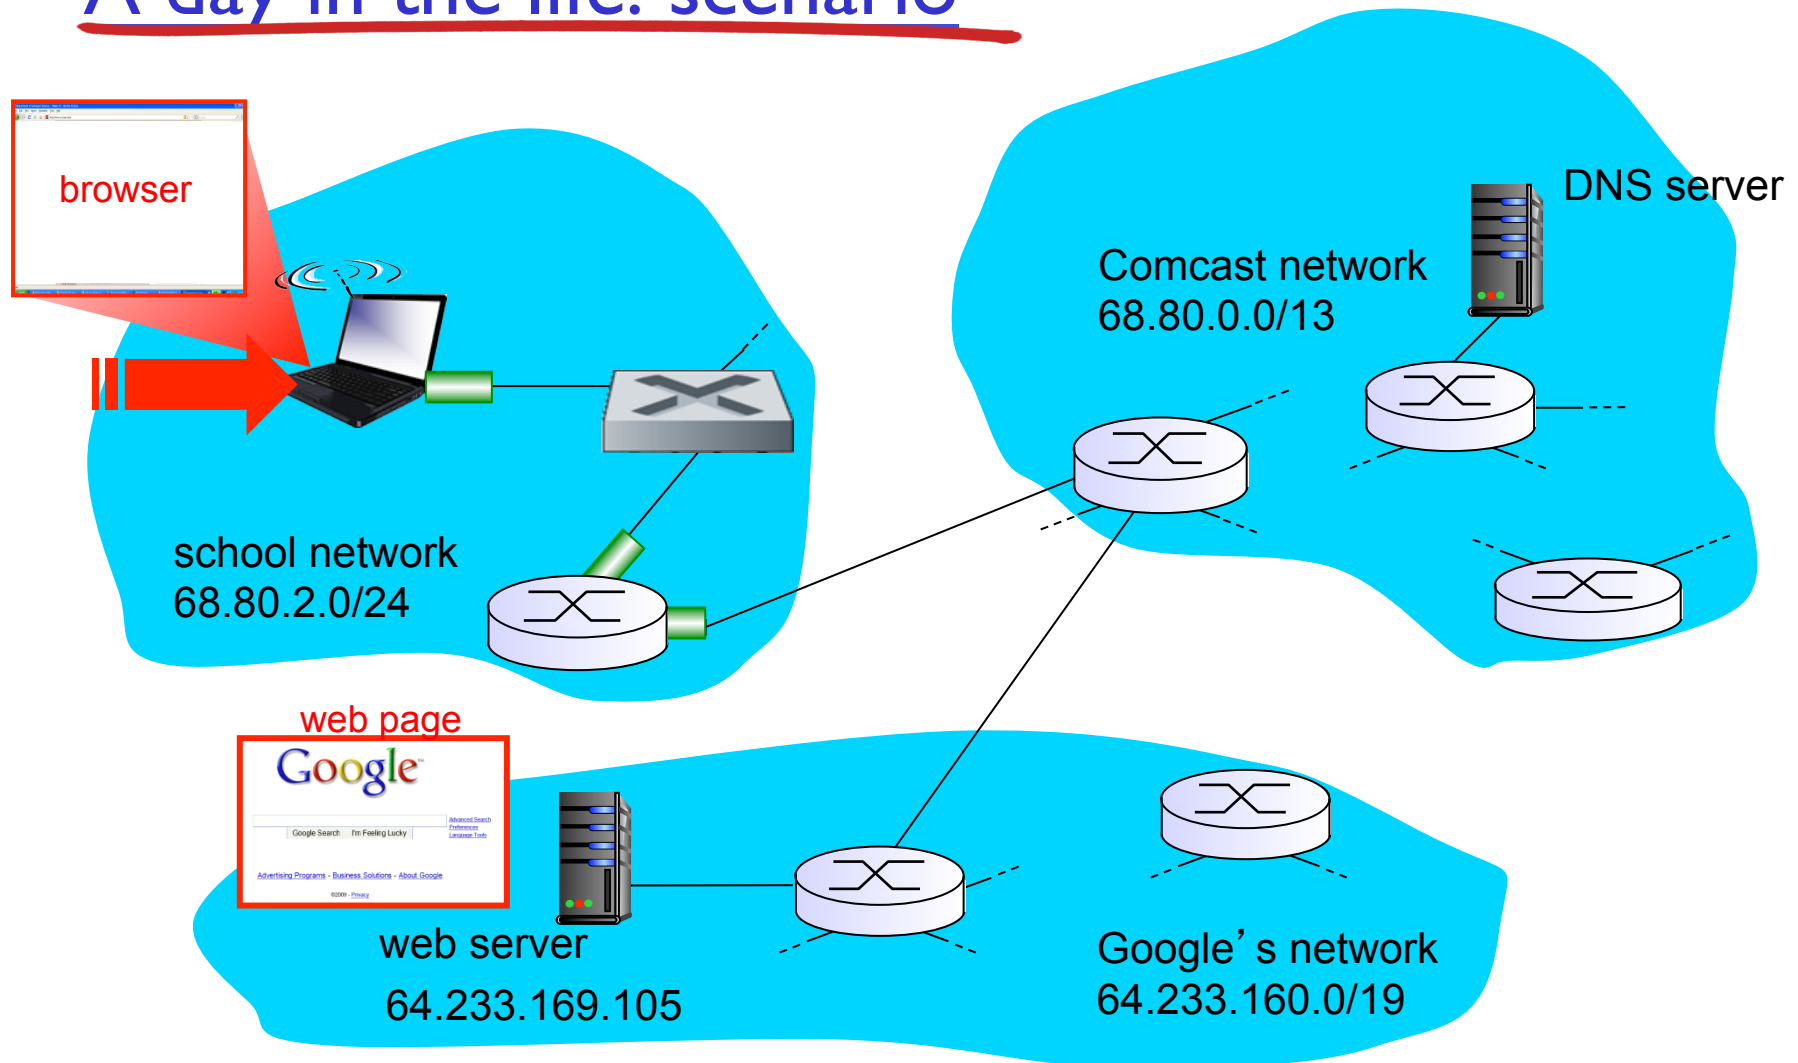


A day in the life... connecting to the Internet

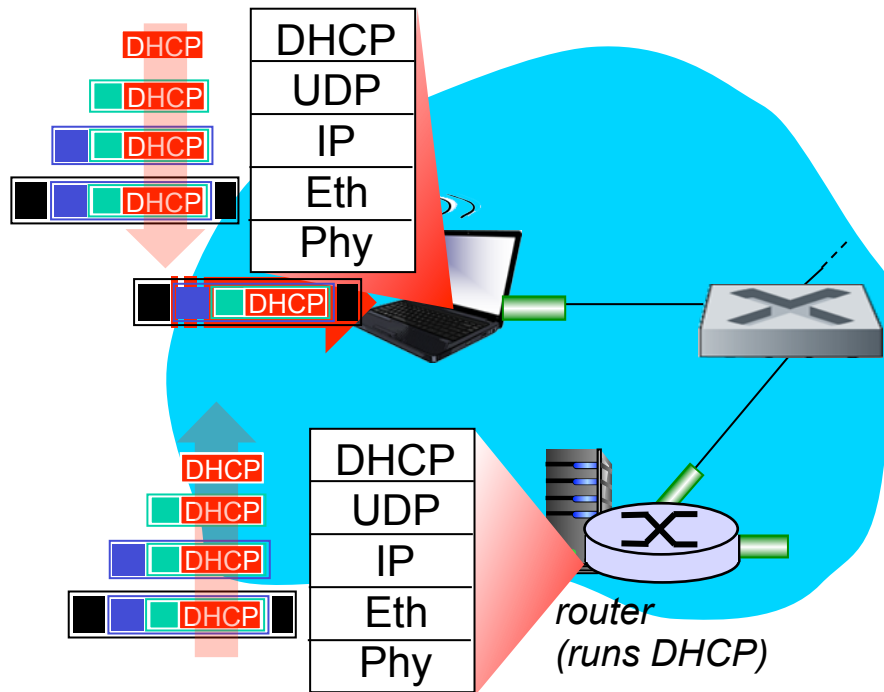

- connecting laptop needs to get its own IP address, addr of first-hop router, addr of DNS server: use **DHCP**
- ❖ DHCP request **encapsulated** in **UDP**, encapsulated in **IP**, encapsulated in **802.3 Ethernet**
- ❖ Ethernet frame **broadcast** (dest: FFFFFFFFFFFFFFFF) on LAN, received at router running **DHCP** server
- ❖ Ethernet **demuxed** to IP demuxed, UDP demuxed to DHCP


A day in the life... connecting to the Internet

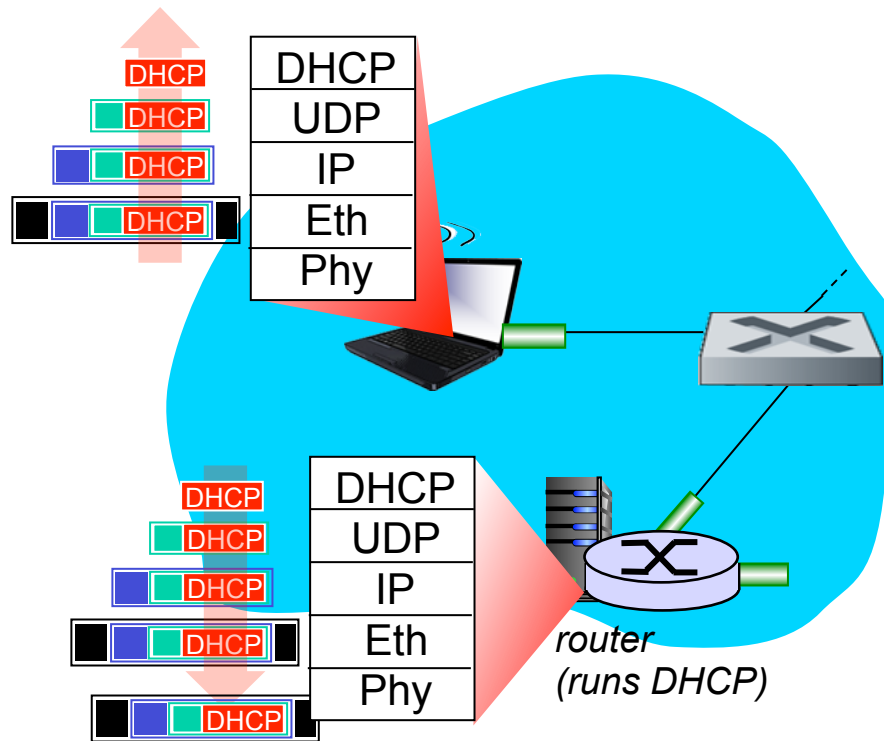

- DHCP server formulates **DHCP ACK** containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- ❖ encapsulation at DHCP server, frame forwarded (**switch learning**) through LAN, demultiplexing at client
- ❖ DHCP client receives DHCP ACK reply


Client now has IP address, knows name & addr of DNS server, IP address of its first-hop router

A day in the life... ARP (before DNS, before HTTP)

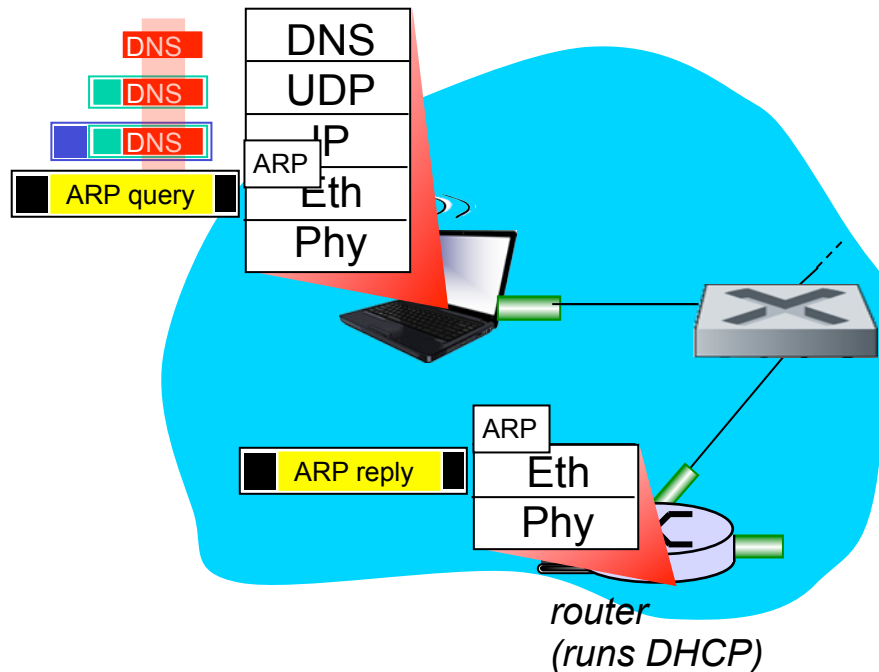

- ❑ before sending *HTTP* request, need IP address of `www.google.com`:
DNS
- ❖ DNS query created, encapsulated in UDP, encapsulated in IP, encapsulated in Eth. To send frame to router, need MAC address of router interface: *ARP*
- ❖ *ARP query* broadcast, received by router, which replies with *ARP reply* giving MAC address of router interface
- ❖ client now knows MAC address of first hop router, so can now send frame containing DNS query


A day in the life... using DNS

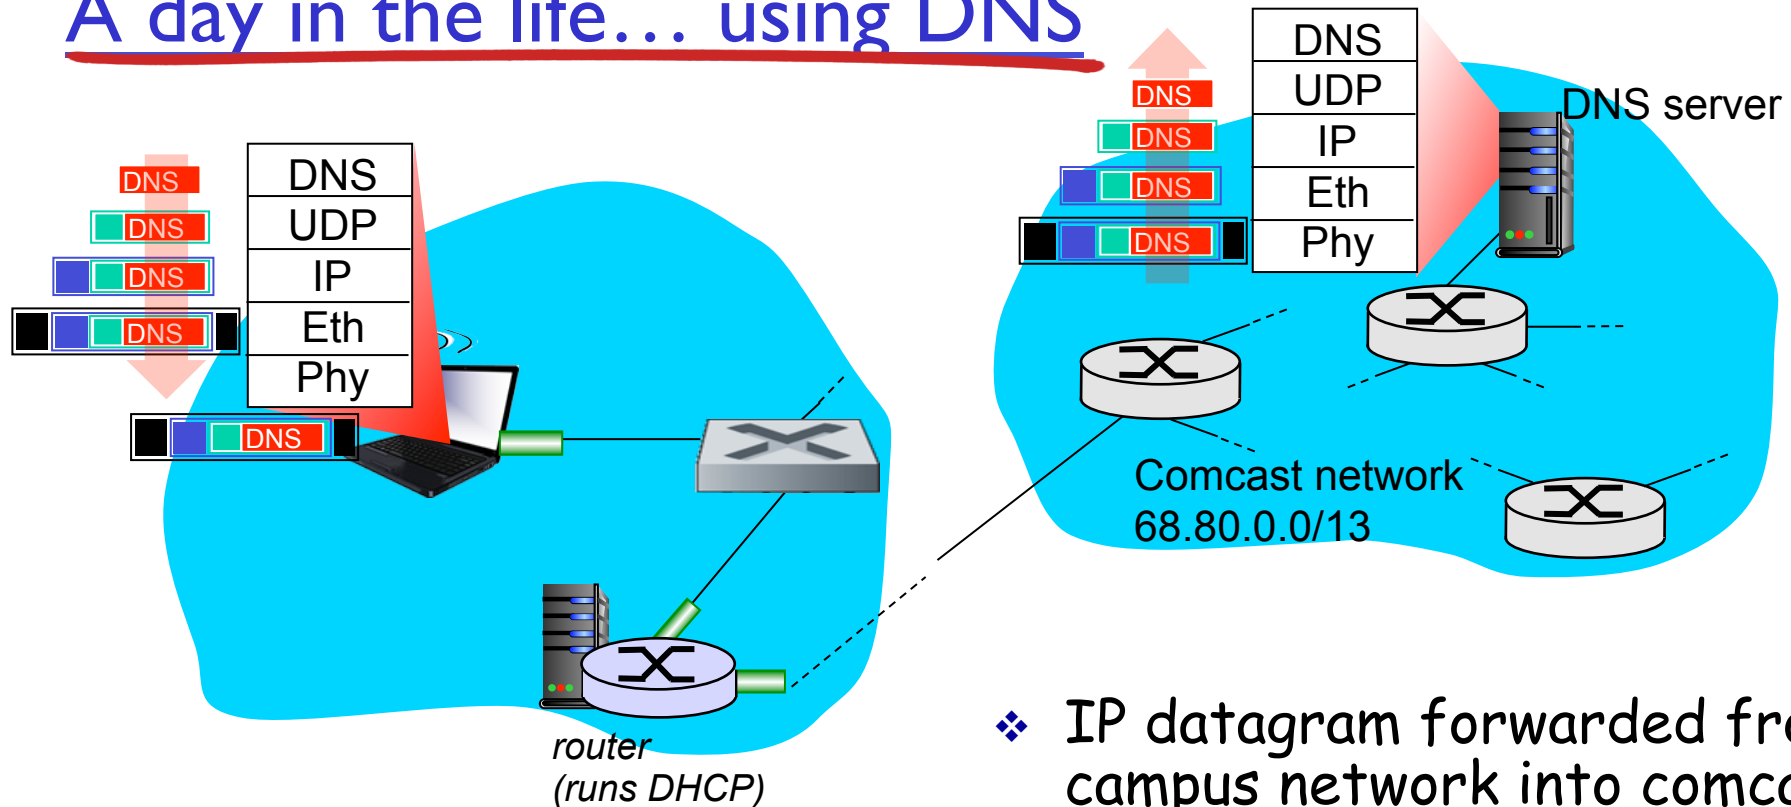


- ❖ IP datagram containing DNS query forwarded via LAN switch from client to 1st hop router

- ❖ IP datagram forwarded from campus network into comcast network, routed (tables created by **RIP, OSPF, IS-IS** and/or **BGP** routing protocols) to DNS server
- ❖ demux'ed to DNS server
- ❖ DNS server replies to client with IP address of **www.google.com**

A day in the life...TCP connection carrying HTTP

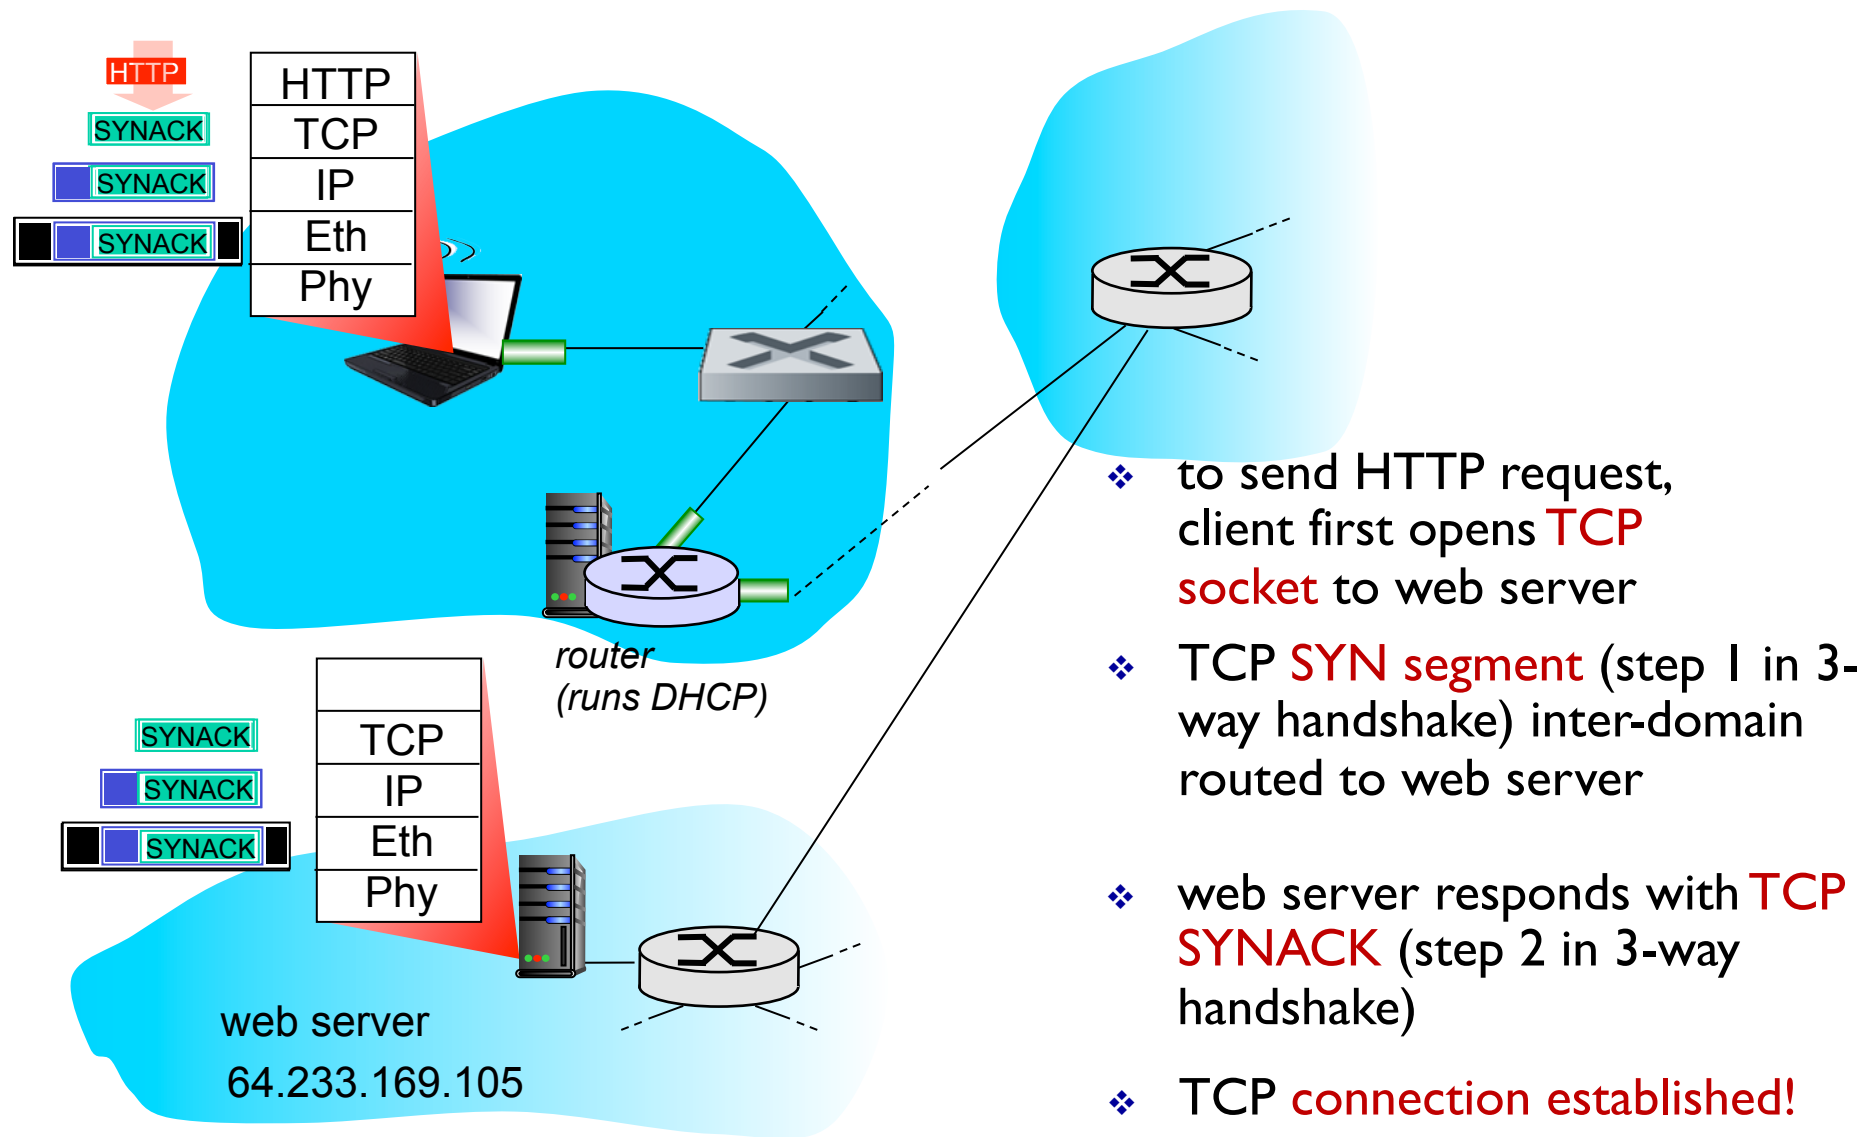

A day in the life... HTTP request/reply

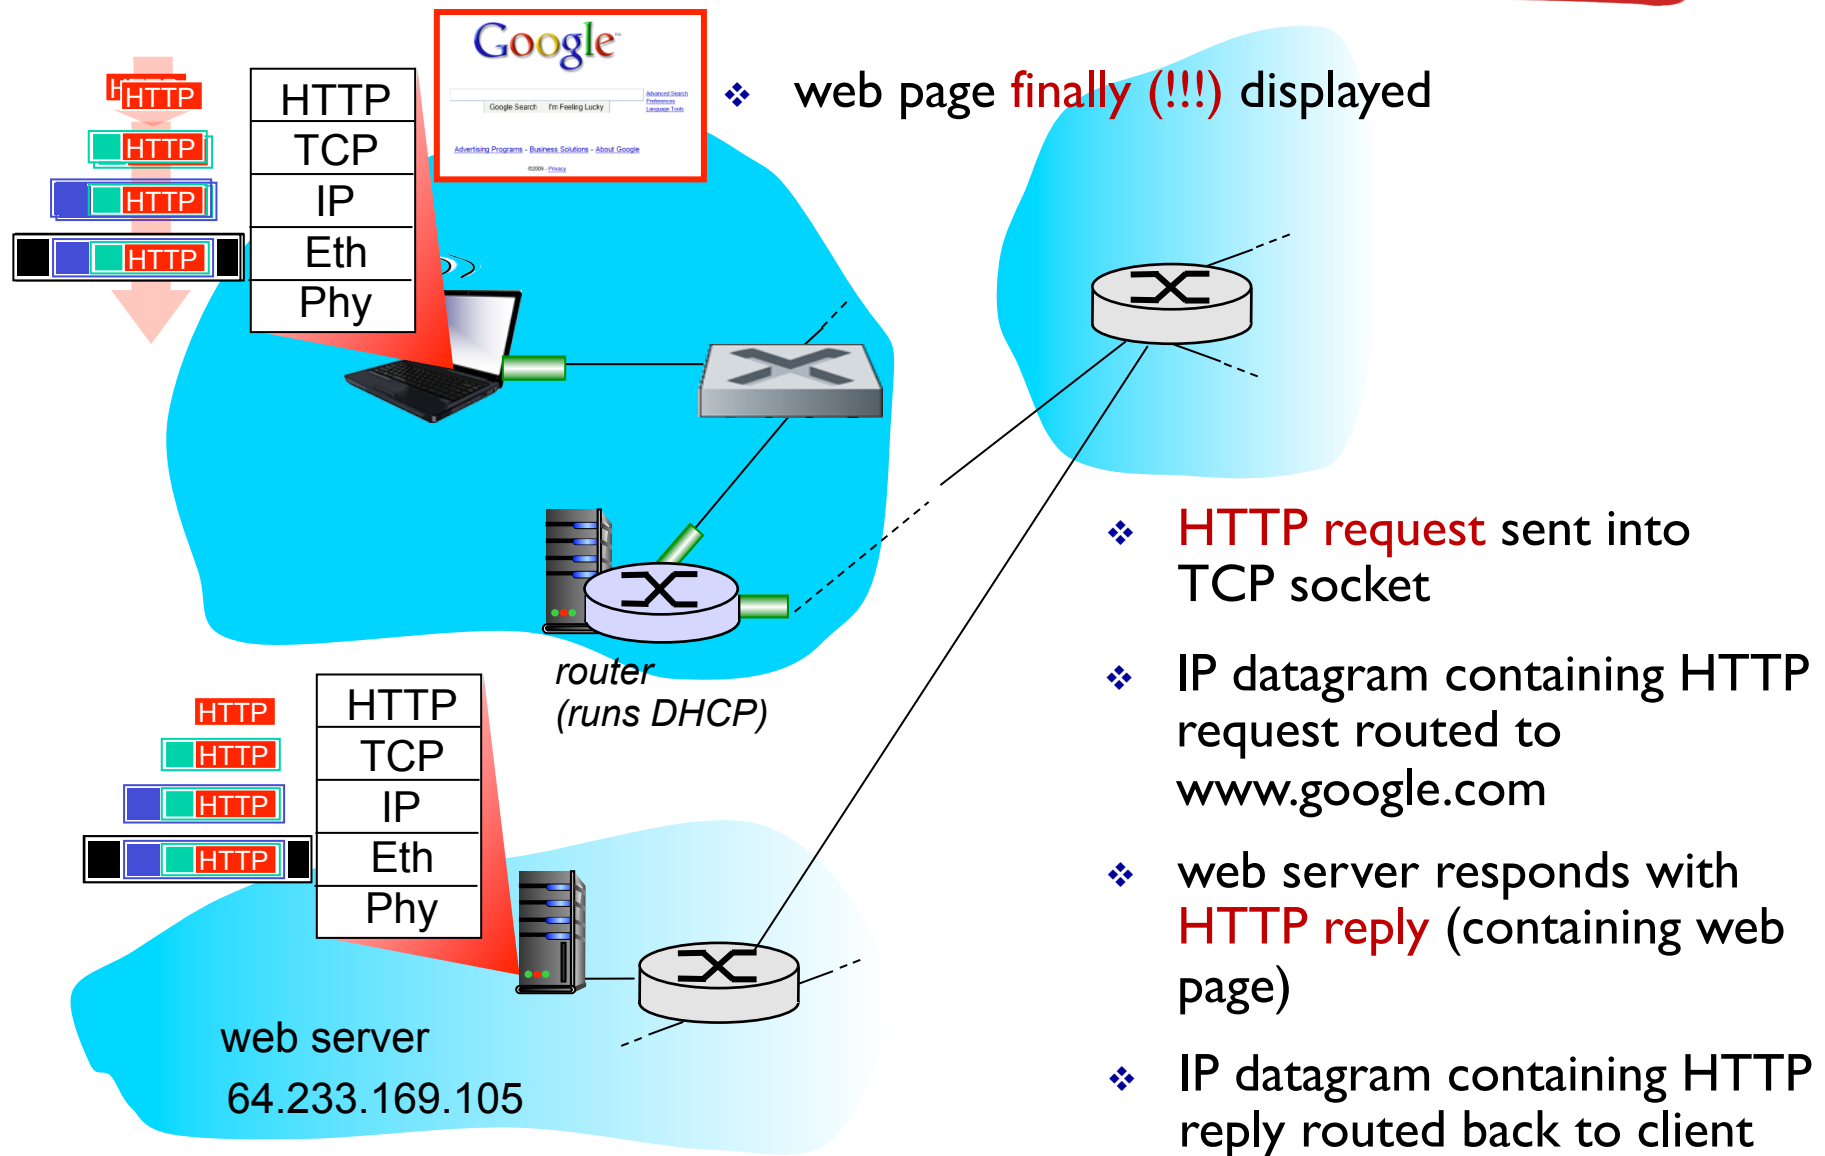

Chapter 5: Summary

- ❑ principles behind data link layer services:
 - error detection, correction
 - sharing a broadcast channel: multiple access
 - link layer addressing
- ❑ instantiation and implementation of various link layer technologies
 - Ethernet
 - switched LANS
 - PPP synthesis: a day in the life of a web request