

Chapter 4 Network Layer

Reti di Elaboratori

Corso di Laurea in Informatica

Università degli Studi di Roma "La Sapienza"

Canale A-L

Prof.ssa Chiara Petrioli

Parte di queste slide sono state prese dal materiale associato al libro
Computer Networking: A Top Down Approach, 5th edition.

All material copyright 1996-2009

J.F Kurose and K.W. Ross, All Rights Reserved

Thanks also to Antonio Capone, Politecnico di Milano, Giuseppe Bianchi and
Francesco LoPresti, Un. di Roma Tor Vergata

Chapter 4: Network Layer

Chapter goals:


- ❑ understand principles behind network layer services:
 - network layer service models
 - forwarding versus routing
 - how a router works
 - routing (path selection)
 - dealing with scale
 - advanced topics: IPv6, mobility
- ❑ instantiation, implementation in the Internet

Chapter 4: Network Layer

- 4.1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- 4.7 Broadcast and multicast routing

Network layer

- ❑ transport segment from sending to receiving host
- ❑ on sending side encapsulates segments into datagrams
- ❑ on rcvng side, delivers segments to transport layer
- ❑ network layer protocols in every host, router
- ❑ router examines header fields in all IP datagrams passing through it

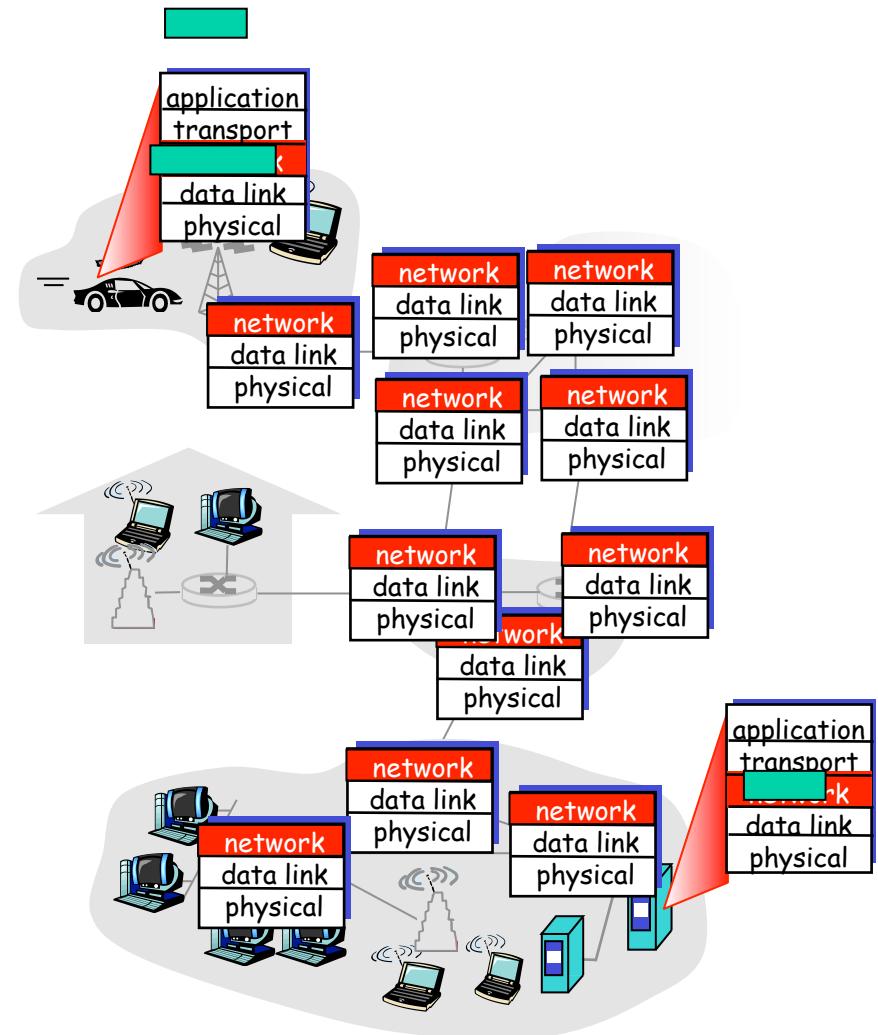


Two Key Network-Layer Functions

- *forwarding*: move packets from router's input to appropriate router output
- *routing*: determine route taken by packets from source to dest.
 - *routing algorithms*

analogy:

- *routing*: process of planning trip from source to dest
- *forwarding*: process of getting through single interchange

Interplay between routing and forwarding

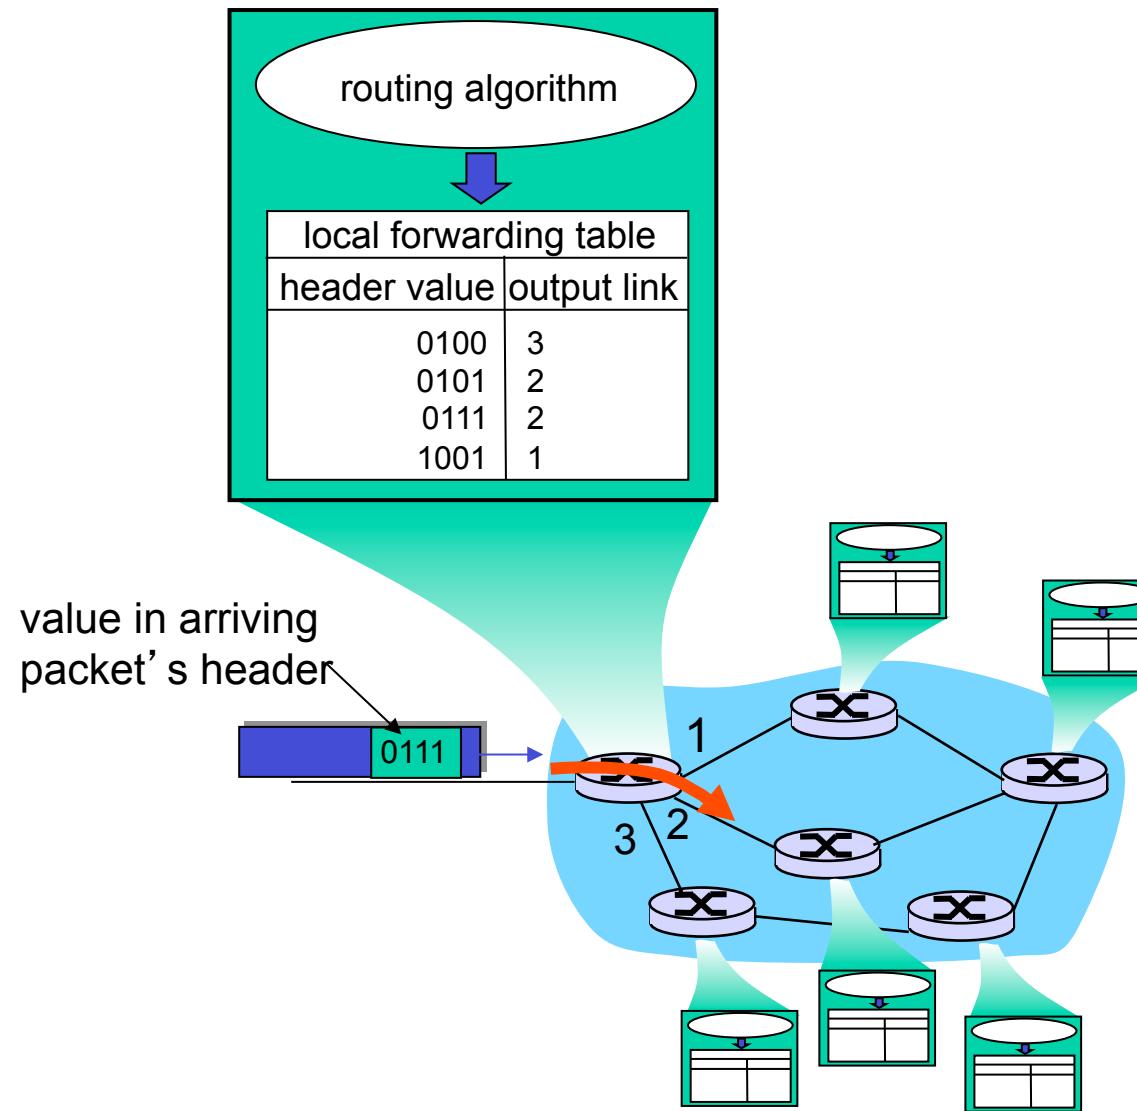

Network service model

Q: What *service model* for “channel” transporting datagrams from sender to receiver?

Example services for individual datagrams:

- guaranteed delivery
- guaranteed delivery with less than 40 msec delay

Example services for a flow of datagrams:

- in-order datagram delivery
- guaranteed minimum bandwidth to flow
- restrictions on changes in inter-packet spacing

Network layer service models:


Network Architecture	Service Model	Guarantees ?				Congestion feedback
		Bandwidth	Loss	Order	Timing	
Internet	best effort	none	no	no	no	no (inferred via loss)
ATM	CBR	constant rate	yes	yes	yes	no congestion
ATM	VBR	guaranteed rate	yes	yes	yes	no congestion
ATM	ABR	guaranteed minimum	no	yes	no	yes
ATM	UBR	none	no	yes	no	no

Connection setup

- 3rd important function in *some* network architectures:
 - ATM, frame relay, X.25
- before datagrams flow, two end hosts *and* intervening routers establish virtual connection
 - routers get involved
- network vs transport layer connection service:
 - **network:** between two hosts (may also involve intervening routers in case of VCs)
 - **transport:** between two processes


ATM networks

- **UNI User-Network Interface:** connette un host con lo switch a cui è collegato
- **NNI Network-Network Interface:** connette due switch.

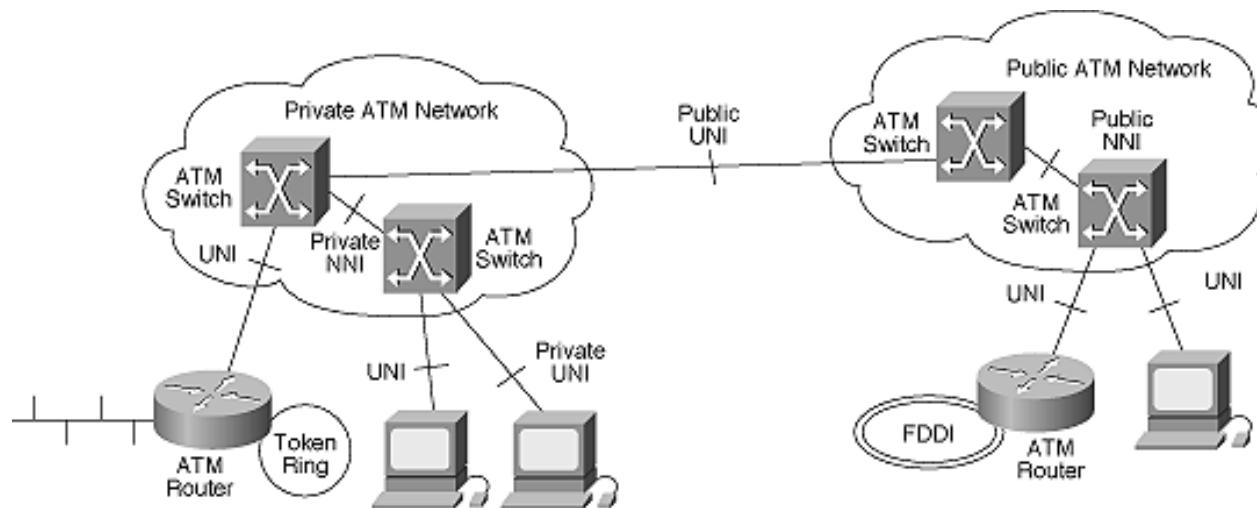

- Virtual Path (insieme di virtual channel): identificate dal valore VPI
- Virtual Channel : identificate dalla coppia VPI/VCI
- ATM usa packet switching inviando pacchetti di dimensione fissa (53 byte) detti celle (5 bytes di header e 48 bytes di payload)
- Header con pochi semplici campi e dimensione fissa della cella per facilitare switching ad alta velocità


ATM switching

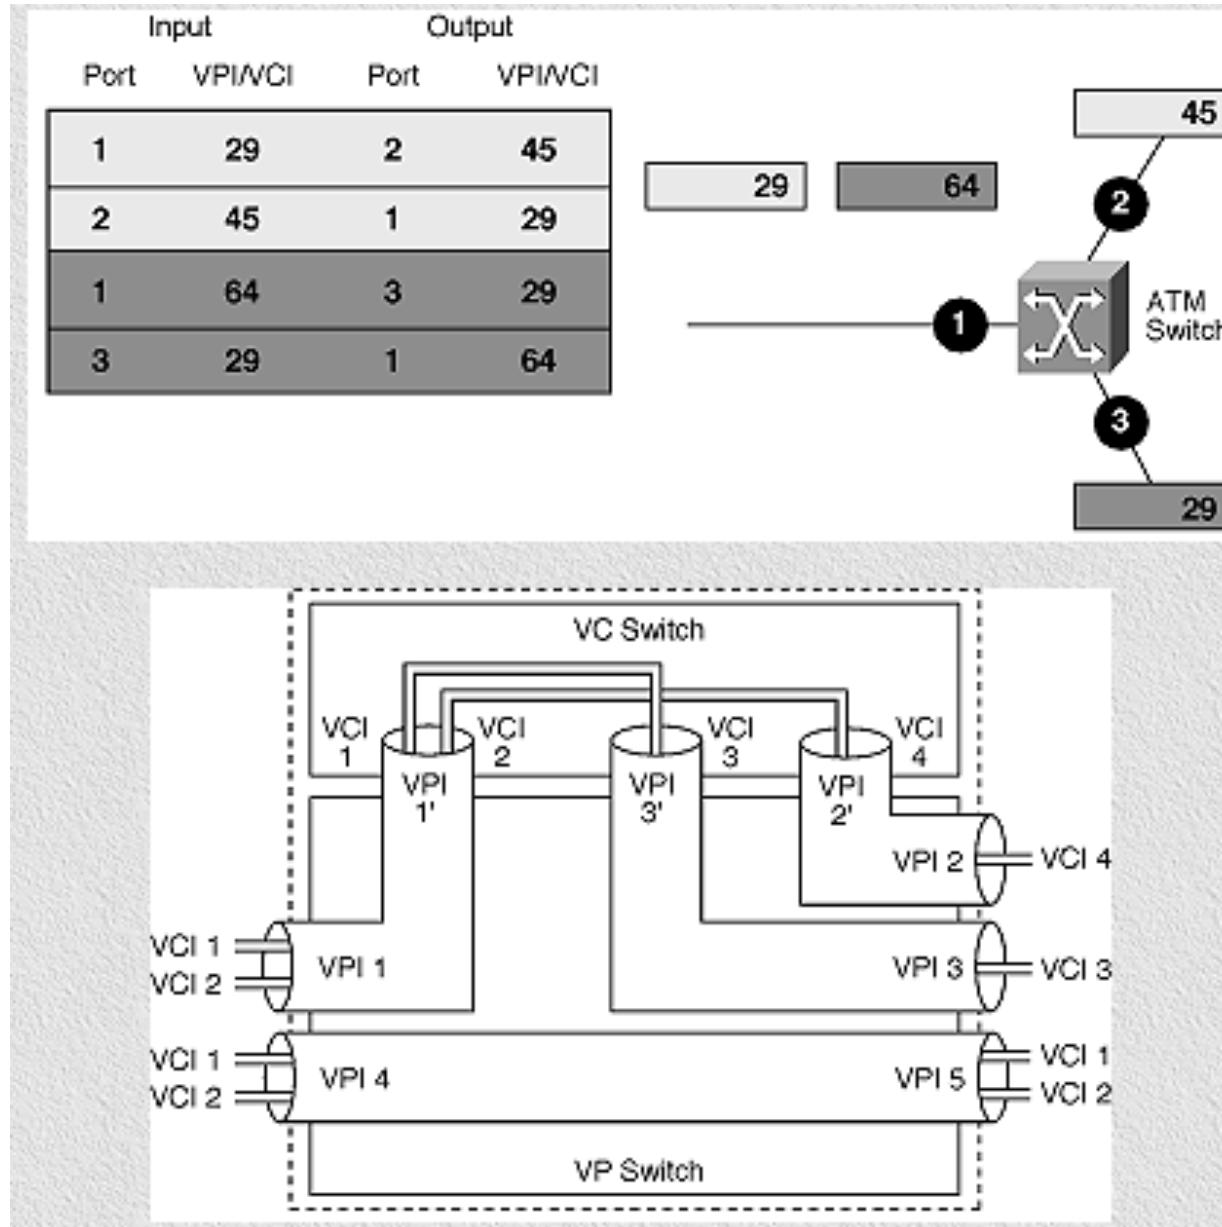

La coppia VPI/VCI ha solo significato *locale* nel senso che vale esclusivamente all'interno di un link, ogni volta che la connessione attraversa uno switch la coppia VPI/VCI in genere viene cambiata ed in questo consiste il meccanismo di switching ovvero nel determinare in base ad una tabella di instradamenti come si mappano le connessioni in base alle porte di provenienza ed al VPI/VCI delle celle.

ATM switching

Input		Output	
Port	VPI/VCI	Port	VPI/VCI
1	29	2	45
2	45	1	29
1	64	3	29
3	29	1	64

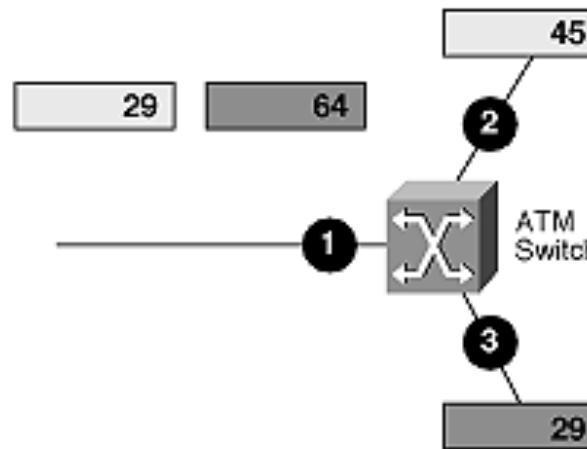

Rete a commutazione di
Pacchetto, a circuito
Virtuale


Orientata alla connessione

→ I pacchetti arrivano
in ordine


Tipi di trasmissione

- CBR
- VBR
- ABR (Available Bit Rate)
- UBR(Unspecified Bit Rate)

Call Admission

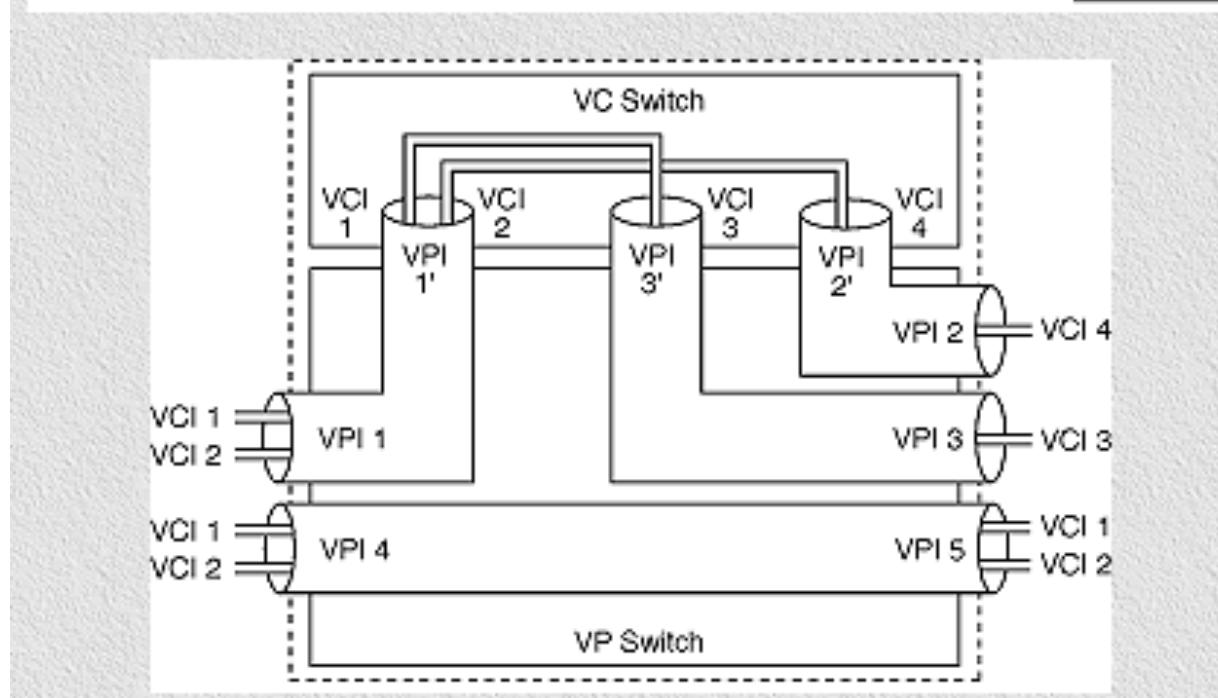

IP over ATM

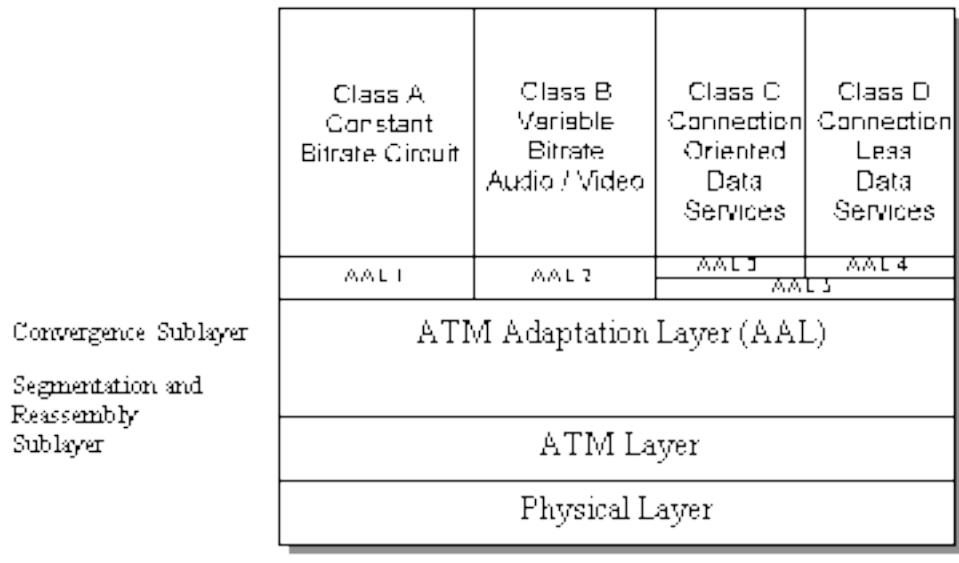

ATM è usata come tecnologia
Di livello 2 in reti TCP/IP

AAL5 per IP over ATM:
Livello Applicativo

TCP

IP

AAL5

ATM Layer

Phy Layer

Chapter 4: Network Layer

- 4.1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- 4.7 Broadcast and multicast routing

Network layer connection and connection-less service

- datagram network provides network-layer connectionless service
- VC network provides network-layer connection service
- analogous to the transport-layer services, but:
 - **service:** host-to-host
 - **no choice:** network provides one or the other
 - **implementation:** in network core

Virtual circuits

“source-to-dest path behaves much like telephone circuit”

- performance-wise
- network actions along source-to-dest path


- call setup, teardown for each call *before* data can flow
- each packet carries VC identifier (not destination host address)
- every router on source-dest path maintains “state” for each passing connection
- link, router resources (bandwidth, buffers) may be *allocated* to VC (dedicated resources = predictable service)

VC implementation

a VC consists of:

1. path from source to destination
 2. VC numbers, one number for each link along path
 3. entries in forwarding tables in routers along path
- packet belonging to VC carries VC number (rather than dest address)
 - VC number can be changed on each link.
 - New VC number comes from forwarding table

Forwarding table

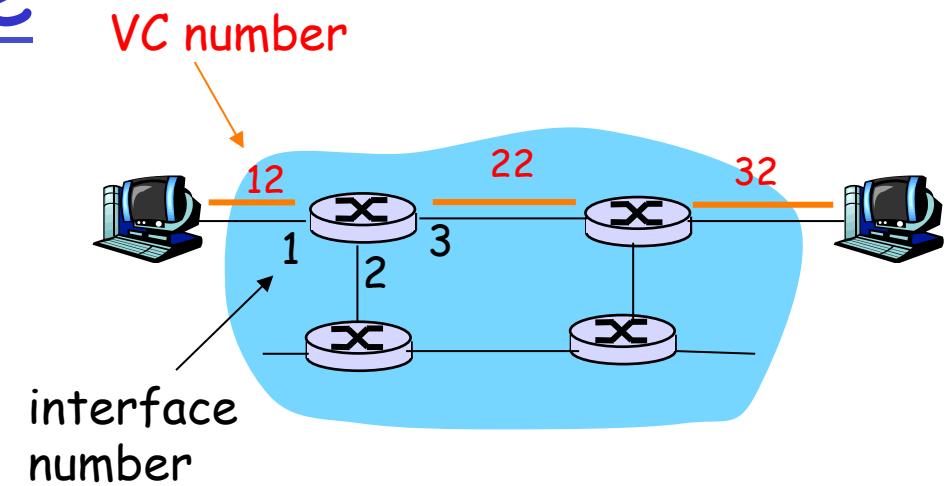


Forwarding table in northwest router:

Incoming interface	Incoming VC #	Outgoing interface	Outgoing VC #
1	12	3	22
2	63	1	18
3	7	2	17
1	97	3	87
...

Routers maintain connection state information!


Virtual circuits: signaling protocols

- ❑ used to setup, maintain teardown VC
- ❑ used in ATM, frame-relay, X.25
- ❑ not used in today's Internet

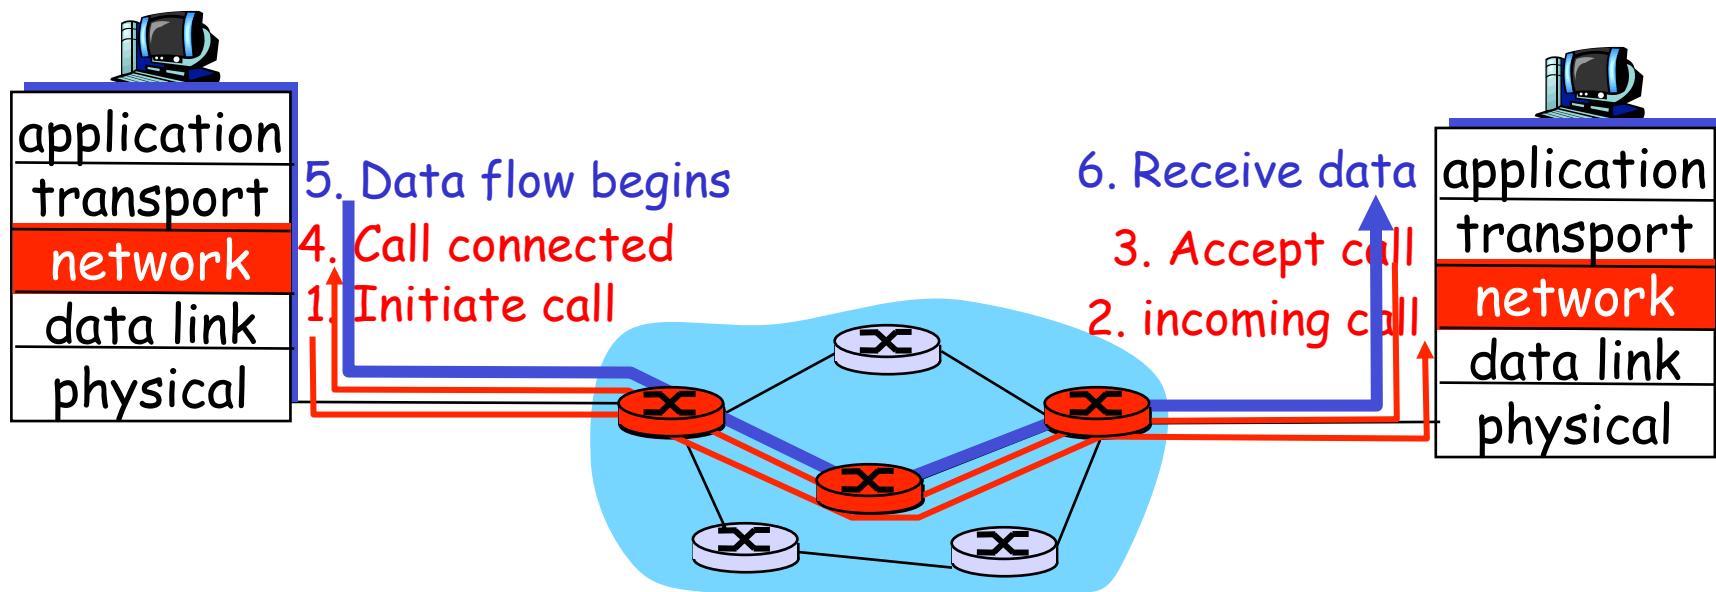

Datagram networks

- no call setup at network layer
- routers: no state about end-to-end connections
 - no network-level concept of “connection”
- packets forwarded using destination host address
 - packets between same source-dest pair may take different paths

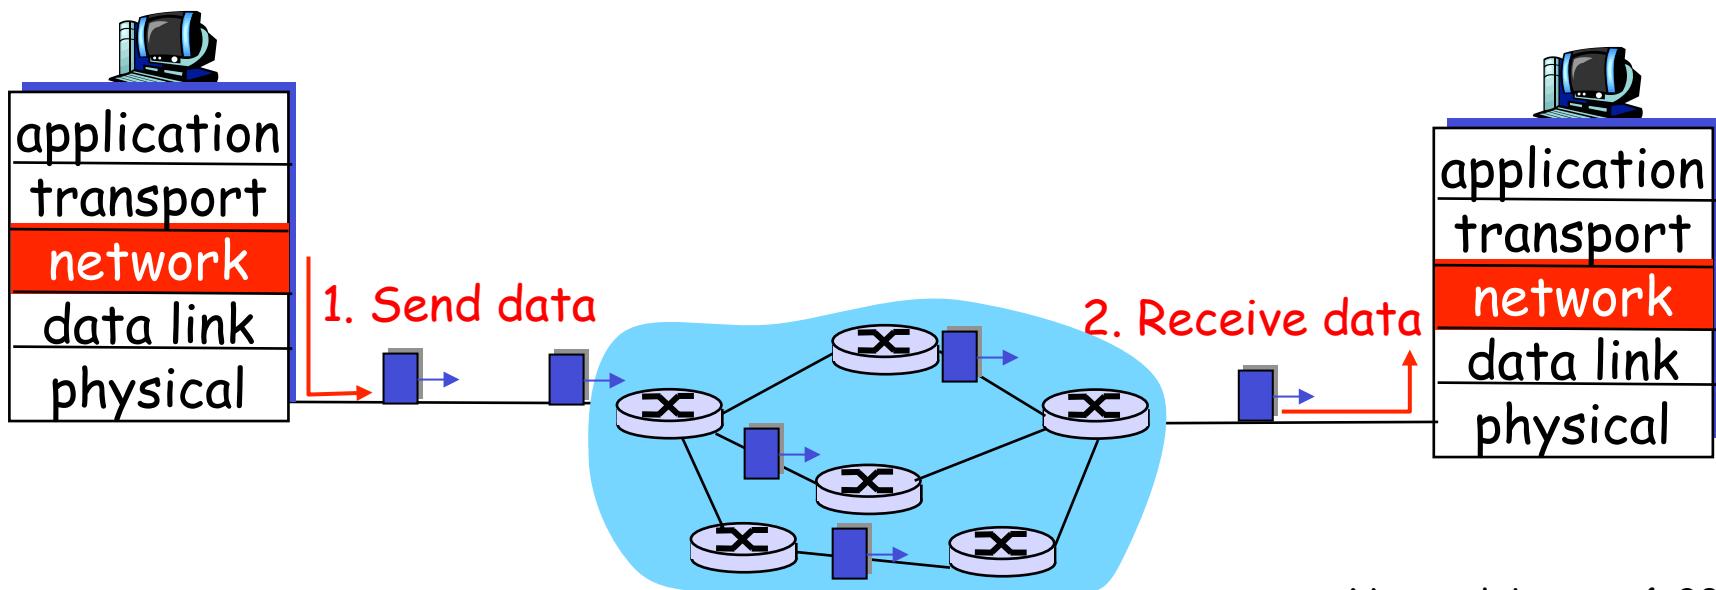

Forwarding table

4 billion
possible entries

<u>Destination Address Range</u>	<u>Link Interface</u>
11001000 00010111 00010000 00000000 through 11001000 00010111 00010111 11111111	0
11001000 00010111 00011000 00000000 through 11001000 00010111 00011000 11111111	1
11001000 00010111 00011001 00000000 through 11001000 00010111 00011111 11111111	2
otherwise	3

Longest prefix matching

<u>Prefix Match</u>	<u>Link Interface</u>
11001000 00010111 00010	0
11001000 00010111 00011000	1
11001000 00010111 00011	2
otherwise	3

Examples

DA: 11001000 00010111 00010110 10100001

Which interface?

DA: 11001000 00010111 00011000 10101010

Which interface?

Datagram or VC network: why?

Internet (datagram)

- data exchange among computers
 - “elastic” service, no strict timing req.
- “smart” end systems (computers)
 - can adapt, perform control, error recovery
 - simple inside network, complexity at “edge”
- many link types
 - different characteristics
 - uniform service difficult

ATM (VC)


- evolved from telephony
- human conversation:
 - strict timing, reliability requirements
 - need for guaranteed service
- “dumb” end systems
 - telephones
 - complexity inside network

Chapter 4: Network Layer

- 4.1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- 4.7 Broadcast and multicast routing

The Internet Network layer


Host, router network layer functions:

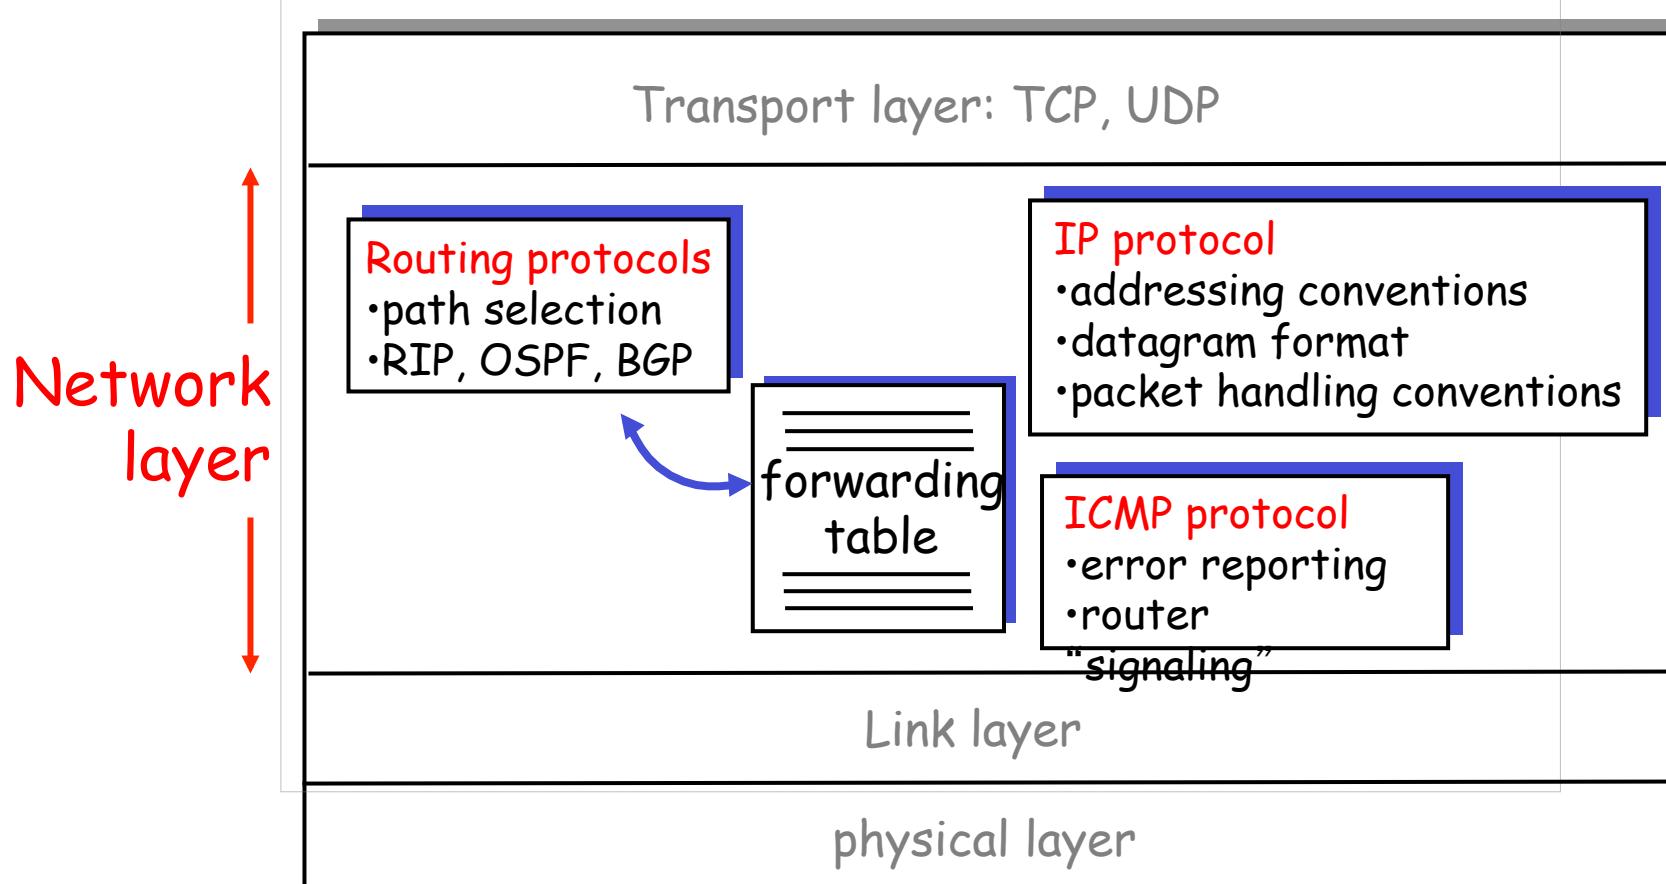


Chapter 4: Network Layer

- 4.1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- 4.7 Broadcast and multicast routing

Interplay between routing, forwarding

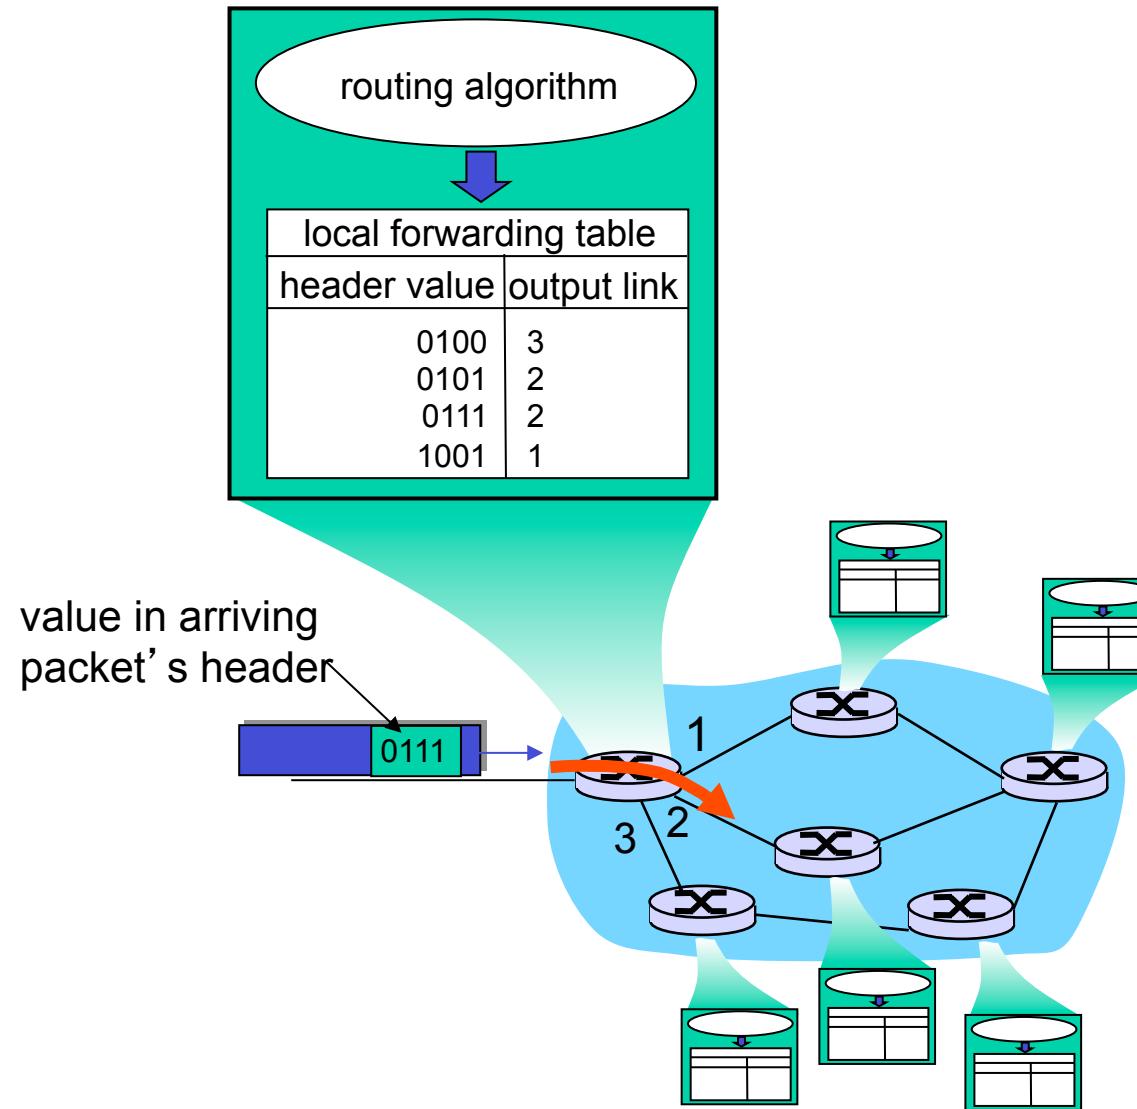

Graph abstraction

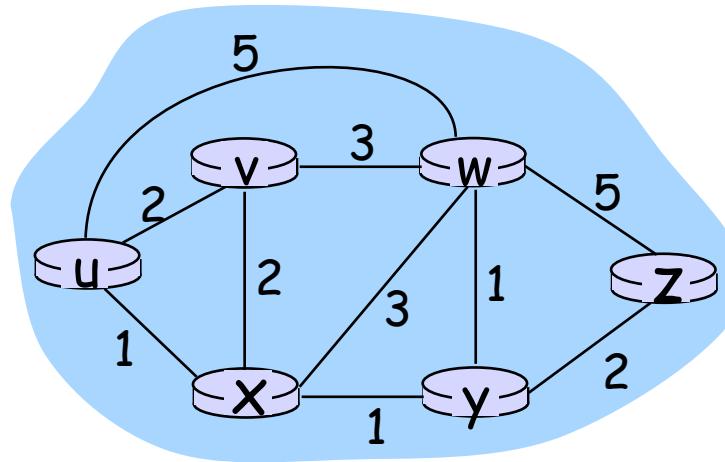

Graph: $G = (N, E)$


$N = \text{set of routers} = \{ u, v, w, x, y, z \}$

$E = \text{set of links} = \{ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) \}$

Remark: Graph abstraction is useful in other network contexts

Example: P2P, where N is set of peers and E is set of TCP connections

Graph abstraction: costs

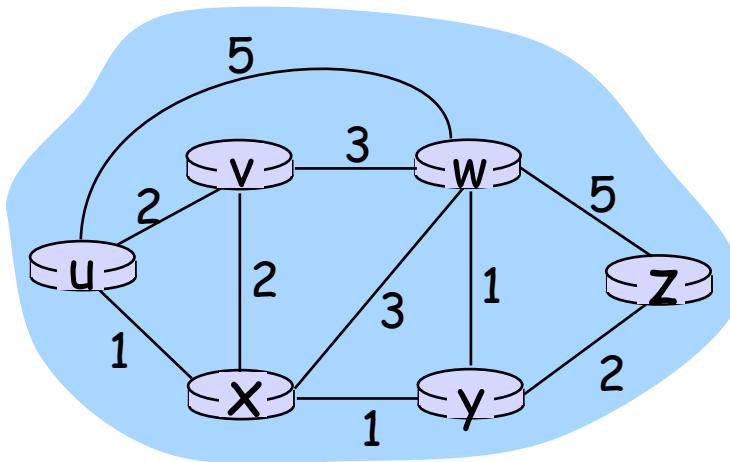

- $c(x,x') = \text{cost of link } (x,x')$
 - e.g., $c(w,z) = 5$
- cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

Cost of path $(x_1, x_2, x_3, \dots, x_p) = c(x_1, x_2) + c(x_2, x_3) + \dots + c(x_{p-1}, x_p)$

Question: What's the least-cost path between u and z ?

Routing algorithm: algorithm that finds least-cost path

Routing Algorithm classification

Global or decentralized information?

Global:

- all routers have complete topology, link cost info
- “link state” algorithms

Decentralized:

- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- “distance vector” algorithms

Static or dynamic?

Static:

- routes change slowly over time

Dynamic:

- routes change more quickly
 - periodic update
 - in response to link cost changes

Chapter 4: Network Layer

- 4.1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
 - Datagram format
 - IPv4 addressing
 - ICMP
 - IPv6
- 4.5 Routing algorithms
 - Link state
 - Distance Vector
 - Hierarchical routing
- 4.6 Routing in the Internet
 - RIP
 - OSPF
 - BGP
- 4.7 Broadcast and multicast routing

A Link-State Routing Algorithm

Dijkstra's algorithm

- net topology, link costs known to all nodes
 - accomplished via “link state broadcast”
 - all nodes have same info
- computes least cost paths from one node (‘source’) to all other nodes
 - gives **forwarding table** for that node
- iterative: after k iterations, know least cost path to k dest.’s

Notation:

- $c(x,y)$: link cost from node x to y ; $= \infty$ if not direct neighbors
- $D(v)$: current value of cost of path from source to dest. v
- $p(v)$: predecessor node along path from source to v
- N' : set of nodes whose least cost path definitively known

Dijkstra's Algorithm


```
1 Initialization:
2    $N' = \{u\}$ 
3   for all nodes  $v$ 
4     if  $v$  adjacent to  $u$ 
5       then  $D(v) = c(u,v)$ 
6     else  $D(v) = \infty$ 
7
8 Loop
9   find  $w$  not in  $N'$  such that  $D(w)$  is a minimum
10  add  $w$  to  $N'$ 
11  update  $D(v)$  for all  $v$  adjacent to  $w$  and not in  $N'$  :
12     $D(v) = \min( D(v), D(w) + c(w,v) )$ 
13  /* new cost to  $v$  is either old cost to  $v$  or known
14  shortest path cost to  $w$  plus cost from  $w$  to  $v$  */
15 until all nodes in  $N'$ 
```



$D(v)=D(u,v)$


Dijkstra's algorithm: example

Step	N'	$D(v), p(v)$	$D(w), p(w)$	$D(x), p(x)$	$D(y), p(y)$	$D(z), p(z)$
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y		4,y	
3	uxyv		3,y		4,y	
4	uxyvw				4,y	
5	uxyvwz					

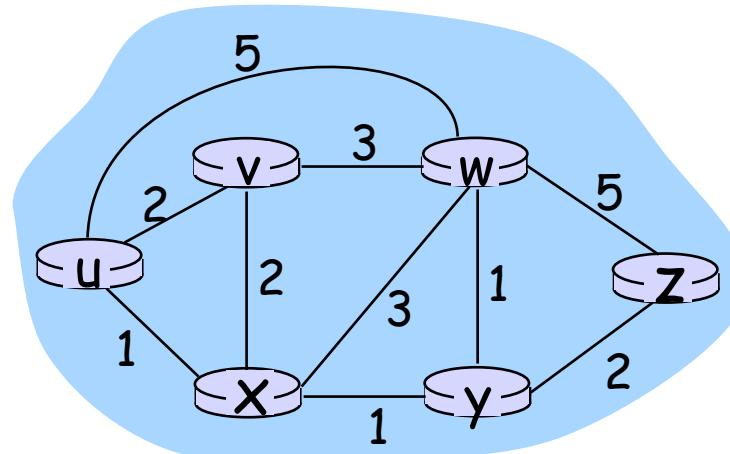


Dijkstra's algorithm: example

Step	N'	$D(v), p(v)$	$D(w), p(w)$	$D(x), p(x)$	$D(y), p(y)$	$D(z), p(z)$
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y		4,y	
3	uxyv		3,y		4,y	
4	uxyvw				4,y	
5	uxyvwz					

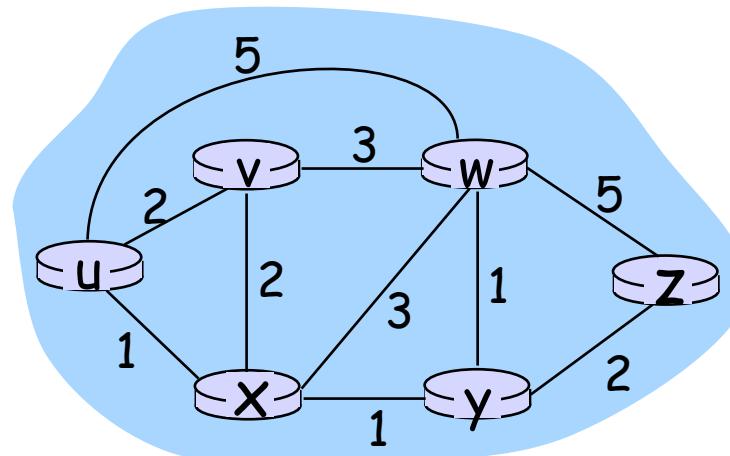

Dijkstra's algorithm: example (2)

Resulting shortest-path tree from u:

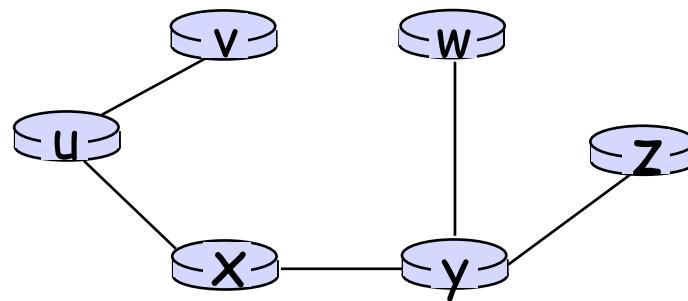

Resulting forwarding table in u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)