



Reti di Elaboratori

Corso di Laurea in Informatica
Università degli Studi di Roma "La Sapienza"
Canale A-L
Prof.ssa Chiara Petrioli

Parte di queste slide sono state prese dal materiale associato al libro Computer Networking: A Top Down Approach, 7th edition. All material copyright 1996-2009


J.F Kurose and K.W. Ross, All Rights Reserved
Thanks also to Antonio Capone, Politecnico di Milano, Giuseppe Bianchi and
Francesco LoPresti, Un. di Roma Tor Vergata

Chapter 2: outline

- 2.1 principles of network applications
 - app architectures
 - o app requirements
- 2.2 Web and HTTP
- 2.3 FTP
- 2.4 electronic mail
 - SMTP, POP3, IMAP
- 2.5 **DNS**

- 2.6 P2P applications
- 2.7 Caching and Content Delivery Networking


FTP: the file transfer protocol

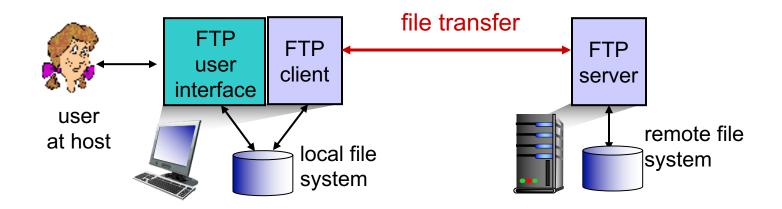

- transfer file to/from remote host
- client/server model
 - client: side that initiates transfer (either to/from remote)
 - server: remote host
- * ftp: RFC 959
- ftp server: port 21

FTP: separate control, data connections

- ☐ FTP client contacts FTP server at port 21, using TCP
- client authorized over control connection
- client browses remote directory, sends commands over control connection
- when server receives file transfer command, server opens 2nd TCP data connection (for file) to client
- after transferring one file, server closes data connection

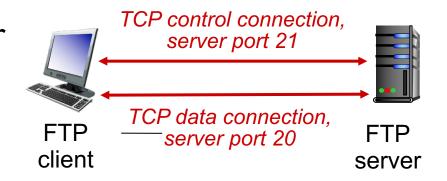

- server opens another TCP data connection to transfer another file
- control connection: "out of band"
- FTP server maintains "state": current directory, earlier authentication

FTP commands, responses

sample commands:

- sent as ASCII text over control channel
- □ USER username
- ☐ PASS password
- ☐ LIST return list of file in current directory
- ☐ RETR filename retrieves (gets) file
- ☐ STOR filename stores

 (puts) file onto remote

 host

sample return codes

- status code and phrase (as in HTTP)
- □ 331 Username OK, password required
- □ 125 data connection already open; transfer starting
- □ 425 Can't open data connection
- ☐ 452 Error writing file

Chapter 2: outline

- 2.1 principles of network applications
 - app architectures
 - O app requirements
- 2.2 Web and HTTP
- 2.3 FTP
- 2.4 electronic mail
 - SMTP, POP3, IMAP
- **2.5 DNS**

- 2.6 P2P applications
- 2.7 Caching and Content Delivery Networking


Electronic mail

Three major components:

- user agents
- mail servers
- simple mail transfer protocol: SMTP

User Agent


- □ a.k.a. "mail reader"
- composing, editing, reading mail messages
- e.g., Outlook, Thunderbird,iPhone mail client
- outgoing, incoming messages stored on server

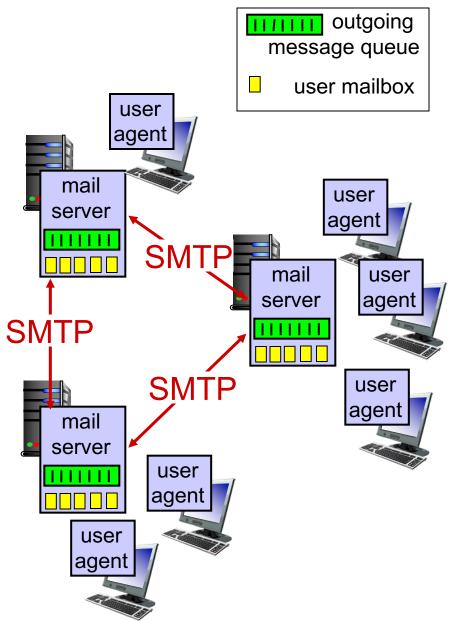

Scenario: Alice sends message to Bob

- I) Alice uses UA to compose
 message "to"
 bob@someschool.edu
- 2) Alice's UA sends message to her mail server; message placed in message queue
- 3) client side of SMTP opens TCP connection with Bob's mail server


- 4) SMTP client sends Alice's message over the TCP connection
- 5) Bob's mail server places the message in Bob's mailbox
- 6) Bob invokes his user agent to read message

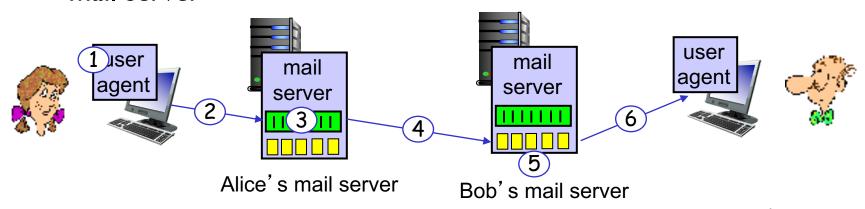

Electronic mail: mail servers

mail servers:

- mailbox contains incoming messages for user
- message queue of outgoing (to be sent) mail messages
- SMTP protocol between mail servers to send email messages
 - client: sending mail server
 - "server": receiving mail server

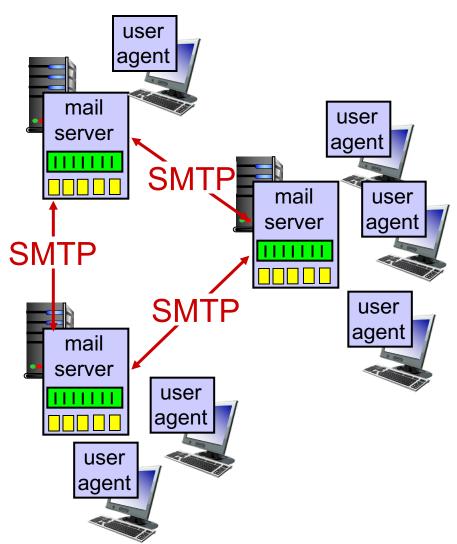

Electronic Mail: SMTP [RFC 2821]

- uses TCP to reliably transfer email message from client to server, port 25
- direct transfer: sending server to receiving server
- three phases of transfer
 - handshaking (greeting)
 - transfer of messages
 - closure
- command/response interaction (like HTTP, FTP)
 - o commands: ASCII text
 - oresponse: status code and phrase
- messages must be in 7-bit ASCI

Sample SMTP interaction

```
S: 220 hamburger.edu
C: HELO crepes.fr
S: 250 Hello crepes.fr, pleased to meet you
C: MAIL FROM: <alice@crepes.fr>
S: 250 alice@crepes.fr... Sender ok
C: RCPT TO: <bob@hamburger.edu>
S: 250 bob@hamburger.edu ... Recipient ok
C: DATA
S: 354 Enter mail, end with "." on a line by itself
C: Do you like ketchup?
C: How about pickles?
C: .
S: 250 Message accepted for delivery
C: QUIT
S: 221 hamburger.edu closing connection
```

SMTP: final words

- SMTP uses persistent connections
- ☐ SMTP requires message (header & body) to be in 7-bit ASCII
- ☐ SMTP server usesCRLF.CRLF todetermine end of message

comparison with HTTP:

- ☐ HTTP: pull
- □ SMTP: push
- both have ASCII command/response interaction, status codes
- HTTP: each object encapsulated in its own response msg
- SMTP: multiple objects sent in multipart msg

Mail message format


SMTP: protocol for exchanging email msgs

RFC 822: standard for text message format:


- □ header lines, e.g.,
 - O To:
 - From:
 - Subject:

different from SMTP MAIL FROM, RCPT TO: commands!

- □ Body: the "message"
 - ASCII characters only

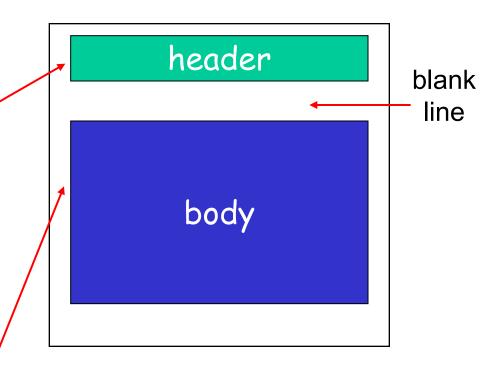

Mail access protocols

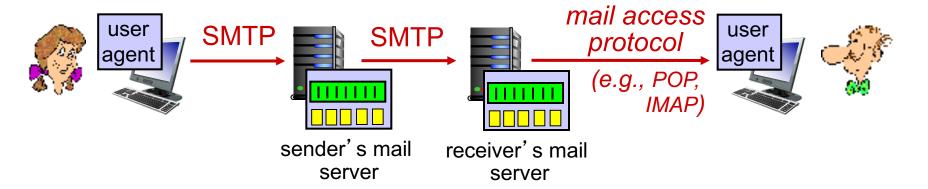

- □ SMTP: delivery/storage to receiver's server
- ☐ mail access protocol: retrieval from server
 - POP: Post Office Protocol [RFC 1939]: authorization, download
 - IMAP: Internet Mail Access Protocol [RFC 1730]: more features, including manipulation of stored msgs on server
 - O HTTP: gmail, Hotmail, Yahoo! Mail, etc.

POP3 protocol

authorization phase

- client commands:
 - o user: declare username
 - opass: password
- server responses
 - +OK
 - -ERR

transaction phase, client:

- list: list message numbers
- retr: retrieve message by number
- □ dele: delete
- □ quit

```
S: +OK POP3 server ready
C: user bob
S: +OK
C: pass hungry
S: +OK user successfully logged on
C: list
S: 1 498
S: 2 912
S:
C: retr 1
S: <message 1 contents>
S:
C: dele 1
C: retr 2
S: <message 1 contents>
S:
C: dele 2
```

S: +OK POP3 server signing off

C: quit

POP3 (more) and IMAP

more about POP3

- previous example usesPOP3 "download and delete" mode
 - Bob cannot re-read email if he changes client
- □ POP3 "download-andkeep": copies of messages on different clients
- POP3 is stateless across sessions

IMAP

- keeps all messages in one place: at server
- allows user to organize messages in folders
- keeps user state across sessions:
 - names of folders and mappings between message IDs and folder name

Chapter 2: outline


- 2.1 principles of network applications
 - app architectures
 - O app requirements
- 2.2 Web and HTTP
- 2.3 FTP
- 2.4 electronic mail
 - O SMTP, POP3, IMAP
- **2.5 DNS**

- 2.6 P2P applications
- 2.7 Caching and Content Delivery Networking

Web caches (proxy server)

goal: satisfy client request without involving origin server

- user sets browser: Web accesses via cache
- browser sends all HTTP requests to cache
 - object in cache: cache returns object
 - else cache requestsobject from originserver, then returnsobject to client

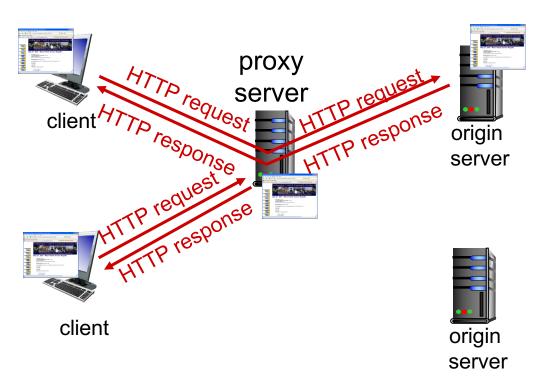

More about Web caching

- cache acts as both client and server
 - server for original requesting client
 - client to origin server
- typically cache is installed by ISP (university, company, residential ISP)

why Web caching?

- reduce response time for client request
- reduce traffic on an institution's access link
- Internet dense with caches: enables "poor" content providers to effectively deliver content (so too does P2P file sharing)

Caching example:


assumptions:

- avg object size: I00K bits
- avg request rate from browsers to origin servers: I 5/sec
- avg data rate to browsers: 1.50 Mbps
- RTT from institutional router to any origin server: 2 sec
- access link rate: 1.54 Mbps

consequences:

problem!

- LAN utilization: 0,15%
- access link utilization = 99%
- total delay = Internet delay +
 access delay + LAN delay
 = 2 sec + minutes + usecs

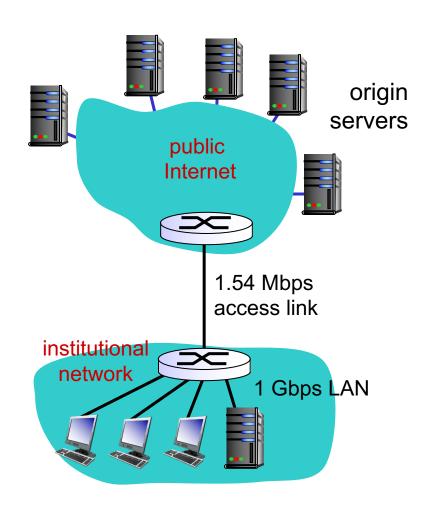

Caching example: fatter access link


assumptions:

- avg object size: I00K bits
- avg request rate from browsers to origin servers: I 5/sec
- avg data rate to browsers: 1.50Mbps154 Mbps
- RTT from institutional router to any origin server: 2 sec
- access link rate: 1.54 Mbps

consequences:

9.9%

- LAN utilization: 0,15%
- access link utilization = 9,9%
- total delay = Internet delay + access delay + LAN delay
 - = 2 sec + minutes + usecs msecs

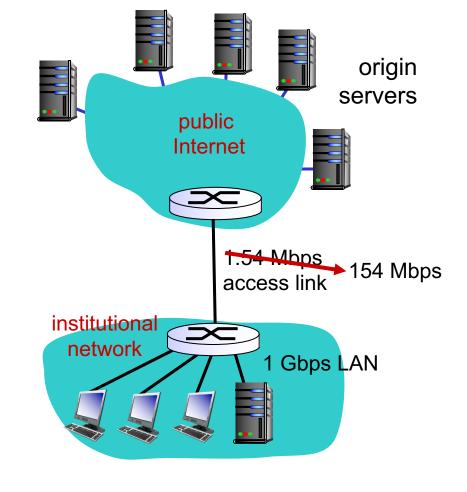

Cost: increased access link speed (not cheap!)

Caching example: install local cache

assumptions:

- avg object size: 100K bits
- avg request rate from browsers to origin servers: 15/sec
- avg data rate to browsers: 1.50 Mbps
- RTT from institutional router to any origin server: 2 sec
- access link rate: 1.54 Mbps

consequences:

- LAN utilization: 0,15%
- access link utilization = 100%
- total delay = Internet delay + access delay + LAN delay $= 2 \sec + n^{2}$

utilization, delay?

How to compute link


origin servers public Internet 1.54 Mbps access link institutional network 1 Gbps LAN local web cache

Cost: web cache (cheap!)

Caching example: install local cache

Calculating access link utilization, delay with cache:

- □suppose cache hit rate is 0.4
 - 40% requests satisfied at cache,60% requests satisfied at origin
- access link utilization:
 - 60% of requests use access link
- data rate to browsers over access link
 - = 0.6*1.50 Mbps = .9 Mbps
 - utilization = 0.9/1.54 = .58
- total delay
 - = 0.6 * (délay from origin servers) +0.4
 * (delay when satisfied at cache)
 - = 0.6 (2.01) + 0.4 (~msecs) = ~ 1.2 secs
 less than with 154 Mbps link (and
 - less than with 154 Mbps link (and cheaper too!)

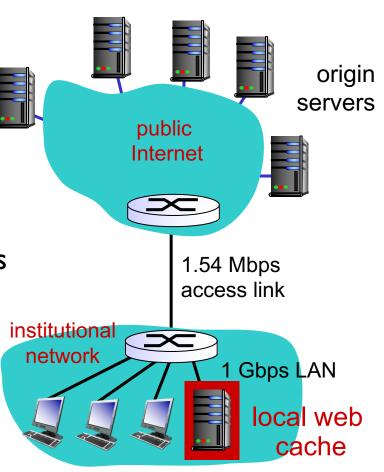

Content distribution networks

challenge: how to stream content (selected from millions of videos) to hundreds of thousands of simultaneous users?


- □option 1: single, large "mega-server"
 - osingle point of failure
 - opoint of network congestion
 - Olong path to distant clients
 - omultiple copies of video sent over outgoing link

....quite simply: this solution doesn't scale


- We have seen the extensive use of caching for reducing latencies in resolving names and accessing web content
- □ Is this enough?
 - Origin servers may still have to be accessed to maintain consistency

- Caching
 - What to cache
 - How to maintain consistency
 - How to invalidate or update in case an inconsistency is detected
- More


here:http://citeseerx.ist.p su.edu/viewdoc/download? doi=10.1.1.73.586&rep=rep1 &type=pdf 2: Application Layer

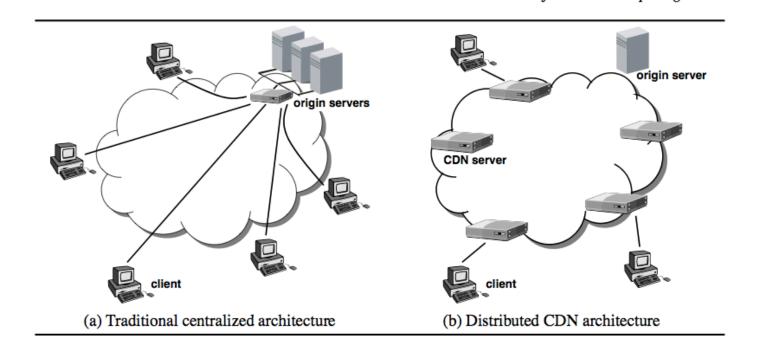


- improving client-perceived response time by bringing content closer to the network edge, and thus closer to end-users
- off-loading work from origin servers by serving larger objects, such as images and multimedia, from multiple CDN servers
- reducing content provider costs by reducing the need to invest in more powerful servers or more bandwidth as user population increases

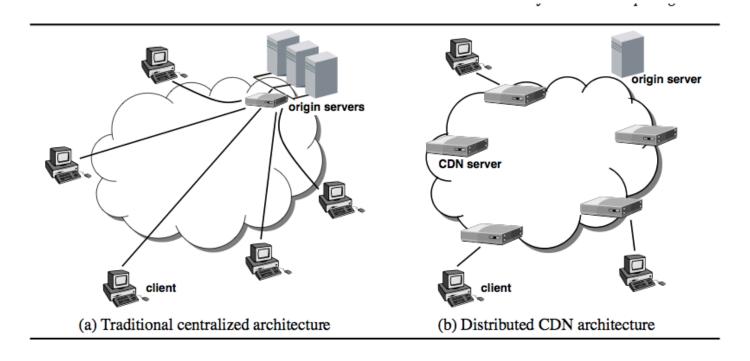

improving site availability by replicating content in many distributed locations

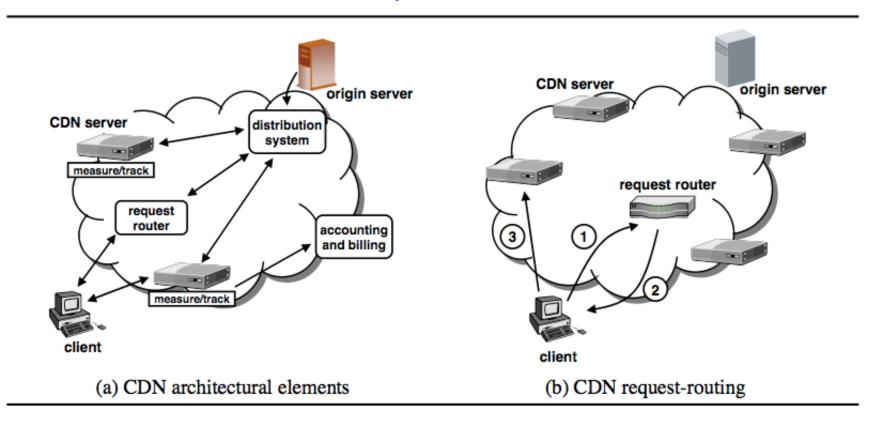

- ☐ HTTP Redirect
- DNS Redirect

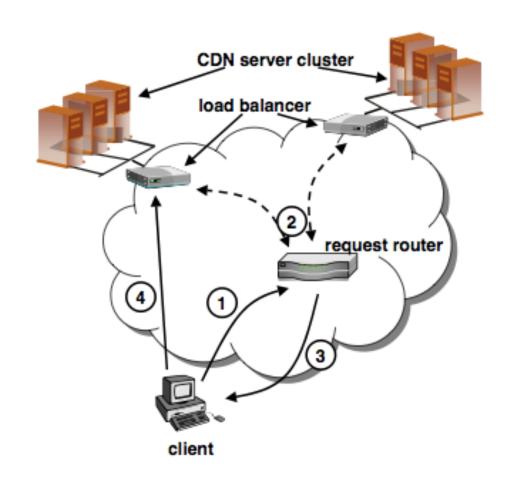


Content distribution networks

challenge: how to stream content (selected from millions of videos) to hundreds of thousands of simultaneous users?


- option 2: store/serve multiple copies of videos at multiple geographically distributed sites (CDN)
 - o enter deep: push CDN servers deep into many access networks
 - close to users
 - used by Akamai, 1700 locations
 - o bring home: smaller number (10's) of larger clusters in POPs near (but not within) access networks
 - used by Limelight

Content Distribution Networks (CDNs)

- CDN: stores copies of content at CDN nodes
 - e.g. Netflix stores copies of MadMen
- subscriber requests content from CDN
 - · directed to nearby copy, retrieves content
 - may choose different copy if network path congested

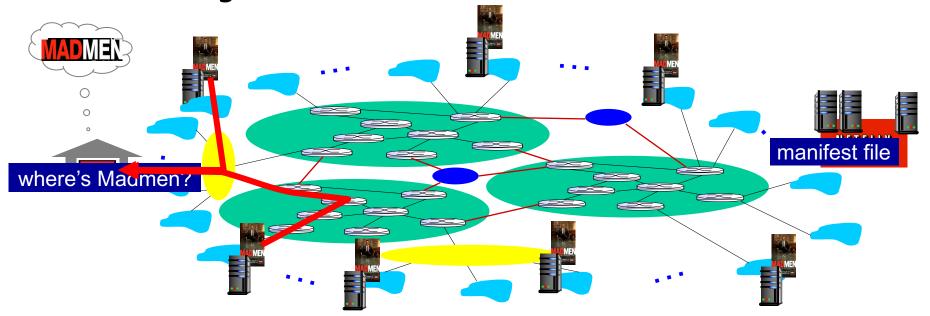

Content Distribution Networks (CDNs)

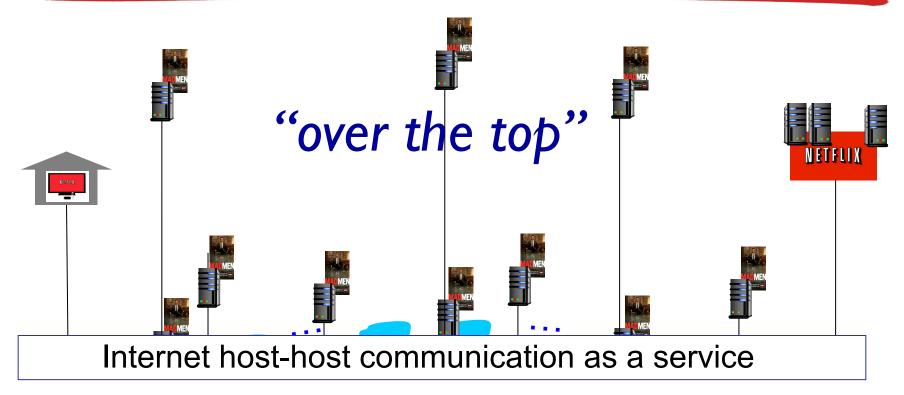


OTT challenges: coping with a congested Internet


- o from which CDN node to retrieve content?
- viewer behavior in presence of congestion?
- what content to place in which CDN node?

CDN content access: a closer look

Bob (client) requests video http://netcinema.com/6Y7B23V video stored in CDN at http://KingCDN.com/NetC6y&B23V

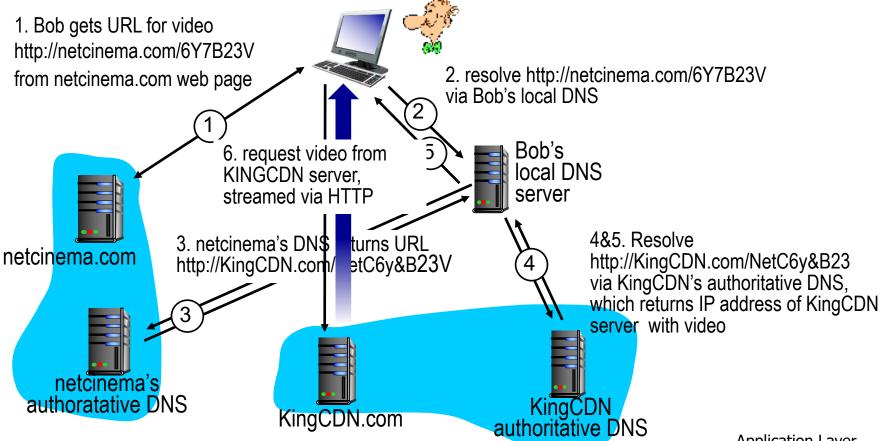

Case study: Netflix

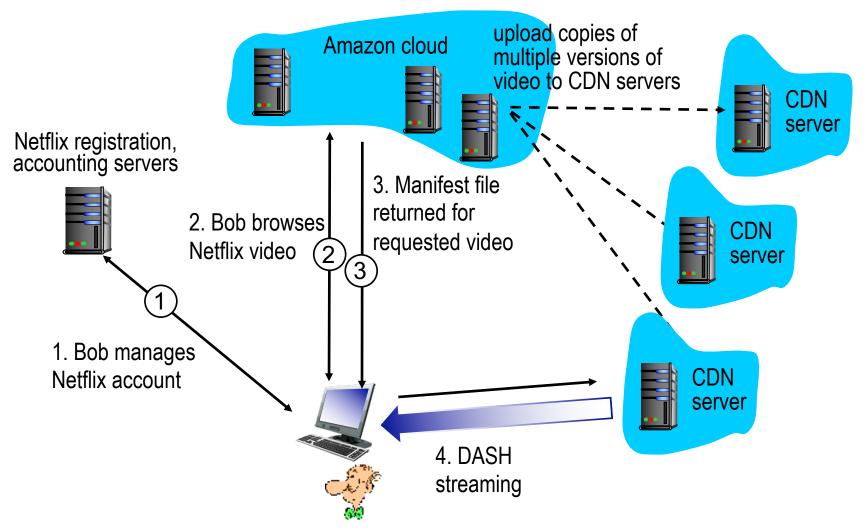

Video Streaming and CDNs: context

- video traffic: major consumer of Internet bandwidth
 - Netflix, YouTube: 37%, 16% of downstream residential ISP traffic
 - ~1B YouTube users, ~75M Netflix users
- challenge: scale how to reach ~1B users?
 - single mega-video server won't work (why?)
- challenge: heterogeneity
 - different users have different capabilities (e.g., wired versus mobile; bandwidth rich versus bandwidth poor)
- solution: distributed, application-level infrastructure












Multimedia: video

- video: sequence of images displayed at constant rate
 - e.g., 24 images/sec
- ☐ digital image: array of pixels
 - each pixel represented by bits
- coding: use redundancy within and between images to decrease # bits used to encode image
 - spatial (within image)
 - temporal (from one image to next)

spatial coding example: instead of sending N values of same color (all purple), send only two values: color value (purple) and number of repeated values (N)



frame i

temporal coding example: instead of sending complete frame at i+1, send only differences from frame i



frame i+1

Multimedia: video

- CBR: (constant bit rate):
 video encoding rate fixed
- VBR: (variable bit rate): video encoding rate changes as amount of spatial, temporal coding changes
- examples:
 - MPEG I (CD-ROM) 1.5
 Mbps
 - MPEG2 (DVD) 3-6 Mbps
 - MPEG4 (often used in Internet, < I Mbps)

spatial coding example: instead of sending N values of same color (all purple), send only two values: color value (purple) and number of repeated values (N)



frame i


temporal coding example: instead of sending complete frame at i+1, send only differences from frame i



frame i+1

Streaming stored video:

simple scenario:

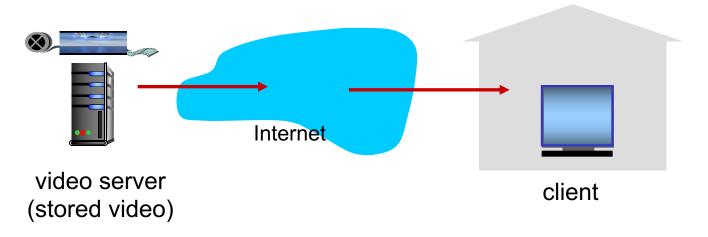

Streaming multimedia: DASH

- □ DASH: Dynamic, Adaptive Streaming over HTTP
- □ server:
 - divides video file into multiple chunks
 - o each chunk stored, encoded at different rates
 - o manifest file: provides URLs for different chunks
- **u** client:
 - o periodically measures server-to-client bandwidth
 - o consulting manifest, requests one chunk at a time
 - chooses maximum coding rate sustainable given current bandwidth
 - can choose different coding rates at different points in time (depending on available bandwidth at time) layer

Streaming multimedia: DASH

- □ DASH: Dynamic, Adaptive Streaming over HTTP
- "intelligence" at client: client determines
 - when to request chunk (so that buffer starvation, or overflow does not occur)
 - what encoding rate to request (higher quality when more bandwidth available)
 - where to request chunk (can request from URL server that is "close" to client or has high available bandwidth)

Case study: Netflix

