

Prolog (part 2)



Andrea Sterbini – sterbini@di.uniroma1.it

Recall:

FACT

```
term(argument1, argument2, arg3 ...).    % rule always true
```

RULE

```
head(arg1, arg2, ...) :-                % to prove this head
    body1(...),                        % we must prove this
    body2(...),                        % AND this
    ...                                % ...
    bodyN(...).                        % AND this
                                        % (SEQUENTIALLY)
```

Details on rule execution

To prove a predicate (e.g. a prolog term) we must search for either:

- 1) a rule with the same head (should unify with the term to prove)
- 2) or a fact with same term (which also should unify)

i.e.:

- the term **functor** must be the same
- the **number of arguments** must be the same
- **each argument** must recursively unify with the corresponding argument

This is generally used to selectively match the predicate clauses

Arguments can be used both as Input or as Output depending on their binding

There is no return value, you can use any argument as output

Lists (dynamic, heterogeneous)

```
List = [ one, two, three, four ]      % list syntax

[ Head | Tail ] = List                % how to extract the first element
    Head      = one                  % fails if the list is empty
    Tail      = [ two, three, four ]

[ First, Second | Rest ] = List        % extracting first and second element
    First      = one                  % fails if the list has less than 2 elements
    Second     = two
    Rest       = [ three, four ]

EmptyList = []                        % the empty list

is_empty([]).                          % test for empty list through unification

length( [],    0).                     % base case: an empty list has length 0
length( [H|Tail], N1) :- length(Tail,N), N1 is N + 1. % recursive case: compute the list length
```

Predicates on lists

% list concatenation/split (if used backward)

append([], B, B). % B if A is empty

% else attach the first in front of the result of appending B to the rest of A

append([Head | Tail], B, [Head | C]) :-
append(Tail,B,C).

% member check/generation

member(A, [A | _]). % A is member if is the first element

member(A, [_ | Tail]) :-
member(A, Tail). % or if is member of the rest

% NOTICE: member should fail if the list is empty

Functional programming

Predicates can be used as if they were functions or to test values

You just add an argument to collect the result

```
square( X, Result ) :- Result is X * X.
```

% function

```
is_odd(X) :- 1 is X mod 2.
```

% test=compute+unify

You can map functions over lists

```
List = [ 1, 2, 3, 4 ], maplist( square, List, List1 ).
```

```
=> List1 = [ 1, 4, 9, 16 ]
```

Or get all elements satisfying some property

```
List = [1, 2, 3, 4], include(is_odd, List, Odd).
```

```
=> Odd = [1, 3]
```

```
List = [1, 2, 3, 4], partition(is_odd, List, Odd, Even).
```

```
=> Odd = [1, 3]      Even = [2, 4]
```

How partition could be defined

```
part( _Predicate, [], [], [] ).           % if there are no elements we produce two empty lists

part( Predicate, [H|T], [H|T1], T2 ) :-
    call(Predicate, H),                   % if the H satisfies the Predicate
    part(Predicate, T, T1, T2).           % H is added in front of the first list

part( Predicate, [H|T], T1, [H|T2] ) :-
    not(call(Predicate,H)),               % else
    part(Predicate, T, T1, T2).           % H is added in front of the second list
```

Notice: this predicate can be used both to partition and to join list ... why?

What if predicates are used “backward”?

% find a list X that is partitioned this way

part(is_odd, X, [1,3], [2,4]).

[1,3,2,4] ; [1,2,3,4] ; [1,2,4,3] ; [2,1,3,4] ; [2,1,4,3] ; [2,4,1,3] % 6 possible lists!!

% What if we use **maplist** “backward”?

maplist(square, X, [1, 4, 9]). % **is** cannot be used “backward” in square

Arguments are not sufficiently instantiated

In: [3] 1 is _1680*_1682

% We need a better definition of square(N,N2)

square(N, N2) :- **nonvar**(N), N2 is N*N.

square(N, N2) :- **var**(N),

 between(0,N2,N),

 N2 is N*N.

% if N is known compute N2=N*N

% else if N is a variable

% look for some integer N between 0 and N

% such that N*N = N2

Meta-programming

You can build terms from lists and viceversa with `=..`

```
term( 1, two, three ) =.. [ term, 1, two, three ]
```

You can **apply**/**call** predicates by adding other arguments

```
apply(Predicate, AdditionalArgsList ) OR call(Predicate, AdditionalArg1, Arg2, ...)  
(this allows using partial predicates)
```

You can add/remove new facts or clauses to/from rule memory (if dynamic)

% add at the beginning

```
asserta( Head :- Body )
```

```
asserta( Fact )
```

% add at the end

```
assertz( Head :- Body )
```

```
assertz( Fact )
```

```
retract( FactOrClause )    % delete FIRST matching rule
```

```
retractall( FactOrClause ) % delete ALL matching rules
```

Definite Clause Grammars (DCG)

an alternative syntax to write parsers/generators

Two arguments are added to each grammar rule head and body:

- the list of input tokens to be recognized
- the remaining list of tokens not consumed yet

RULE READ FROM FILE

```
sentence -->  
    subject,  
    verb,  
    complement.
```

```
%special: terminal tokens as lists  
verb --> [ run ].
```

IS TRANSFORMED TO

```
sentence( Words, Rest3 ) :-  
    subject( Words, Rest1 ),  
    verb( Rest1, Rest2 ),  
    complement(Rest2, Rest3).
```

```
% are simply expected as next token  
verb( [ run | Rest ], Rest ).
```

Grammar example (with gender agreement)

sentence	--> subject, verb, direct_object.	
subject	--> article(Gender), actor(Gender).	% same gender for article & actor
direct_object	--> article(Gender), object(Gender).	% same gender for article & object
article(female)	--> [la].	% female article
article(male)	--> [il].	% male article
actor(_)	--> [chirurgo].	% surgeon is both male/female in Italian
actor(female)	--> [elefantessa].	% female elephant
actor(male)	--> [elefante].	% male elephant
verb	--> [mangiava].	% was eating
verb	--> [guardava].	% was looking
object(female)	--> [insalata].	% salad is female in Italian
object(male)	--> [cavolfiore].	% cauliflower is male in Italian

We can use the grammar to generate all possible sentences ?- phrase(sentence, WordList)

[la, chirurgo, mangiava, la, insalata]	% the female surgeon was eating the salad
[la, chirurgo, mangiava, il, cavolfiore]	% the female surgeon was eating the cauliflower
[la, chirurgo, guardava, la, insalata]	% ... looking the salad
[la, chirurgo, guardava, il, cavolfiore]	% ... looking the cauliflower
[la, elefantessa, mangiava, la, insalata]	% the female elephant was eating the salad
[la, elefantessa, mangiava, il, cavolfiore]	% the female elephant was eating the cauliflower
[la, elefantessa, guardava, la, insalata]	
[la, elefantessa, guardava, il, cavolfiore]	
[il, chirurgo, mangiava, la, insalata]	
[il, chirurgo, mangiava, il, cavolfiore]	
[il, chirurgo, guardava, la, insalata]	
...	%TASK: how can we add also number constraints?

Or to parse (recognize) a sentence and get the parse tree (DEMO)

English grammar example with sing/plural agreement

% a sentence is a **NounPart** followed by a **VerbPart**
s(s(NP,VP)) --> **np**(NP, Num), **vp**(VP, Num).

% a NP could be a **PersonName**

np(NP, Num) --> **pn**(NP, Num).

% or an **Article** followed by a **Name**

np(np(Det,N), Num) --> **det**(Det, Num), **n**(N, Num).

% or an **Article**, a **Name** and a **PredicatePart**

np(np(Det,N,PP), Num) --> **det**(Det, Num), **n**(N, Num),
pp(PP).

% a VerbPart can be a **Verb** followed by a **NounPart**

vp(vp(V,NP), Num) --> **v**(V, Num), **np**(NP, _).

% or a **Verb** followed by a **NounPart** and a **PredicatePart**

vp(vp(V,NP,PP), Num) --> **v**(V, Num), **np**(NP, _), **pp**(PP).

% a PredicatePart is a **Preposition** followed by a **NounPart**

pp(pp(P,NP)) --> **p**(P), **np**(NP, _).

det(det(a), sg) --> [a]. % singular article

det(det(the), _) --> [the]. % article

pn(pn(john), sg) --> [john]. % person name

n(n(man), sg) --> [man]. % singular name

n(n(men), pl) --> [men]. % plural name

n(n(telescope), sg) --> [telescope]. % ...

v(v(sees), sg) --> [sees]. % singular verb



v(v(see), pl) --> [see]. % plural verb

v(v(saw), _) --> [saw]. % verb

p(p(with)) --> [with]. % preposition

Two possible parse trees for the same sentence:

?- phrase(s(Tree), [john, saw, a, man, with, a, telescope]).

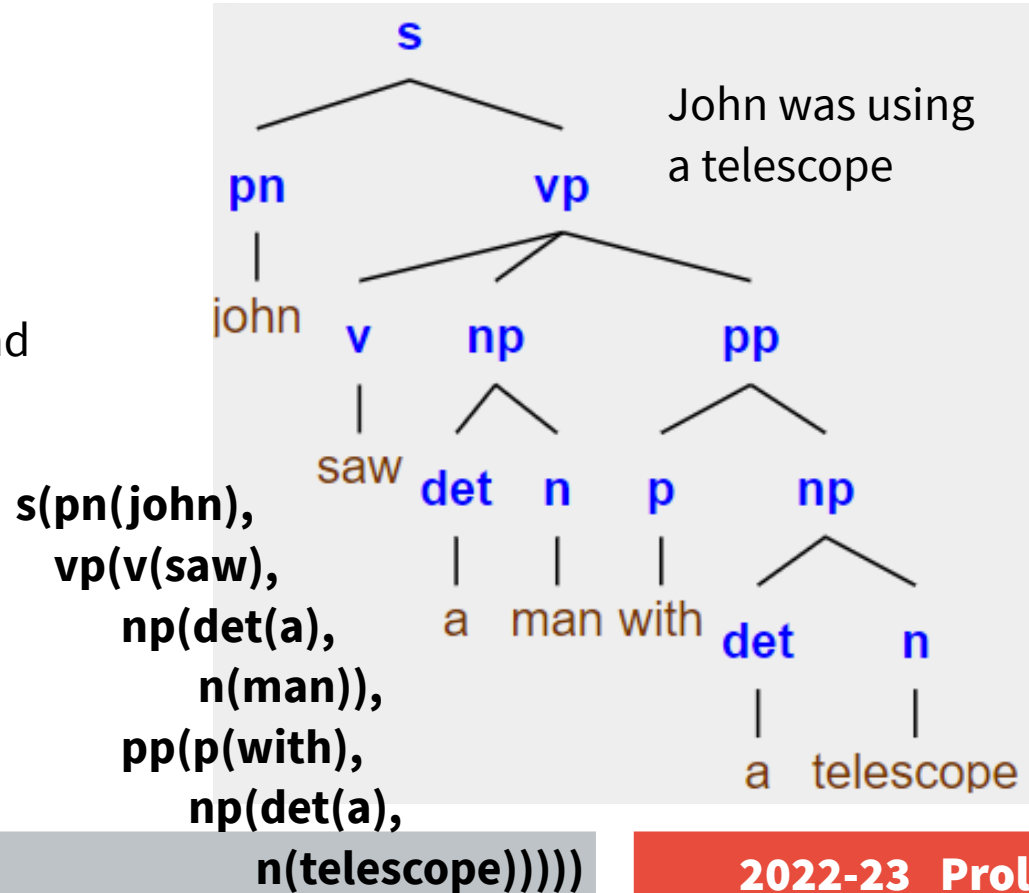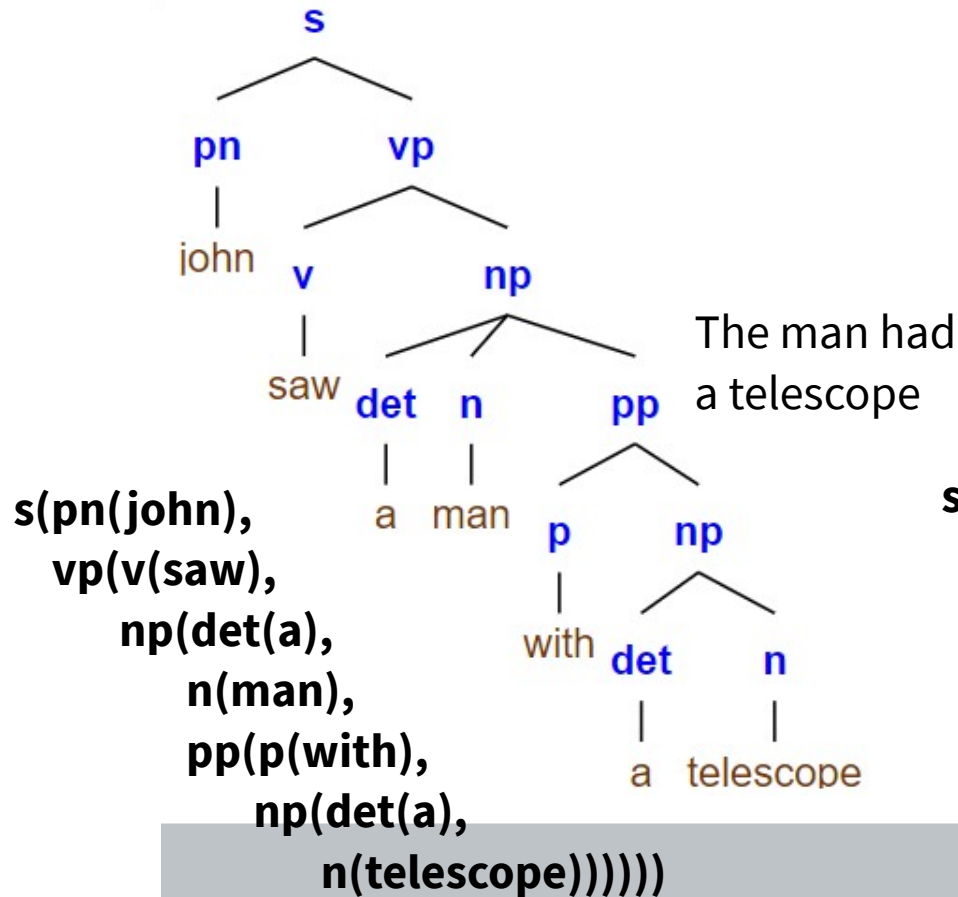

Common extensions

Grammars

grammar rules map easily to Prolog predicates, both for parsing and for text generation

Constraints

the domain of the possible values of a variable can be constrained in many ways (e.g. the sudoku game)

OOP

terms could represent objects and their properties
rules could represent methods

GUI

widgets, events, callbacks and so on

Examples

Limericks

Grammar

Constraints (Sudoku)

Algebraic simplification?

Algebraic derivatives?